


# R&S® ZVA80 R&S® ZVA110 Vector Network Analyzer Specifications

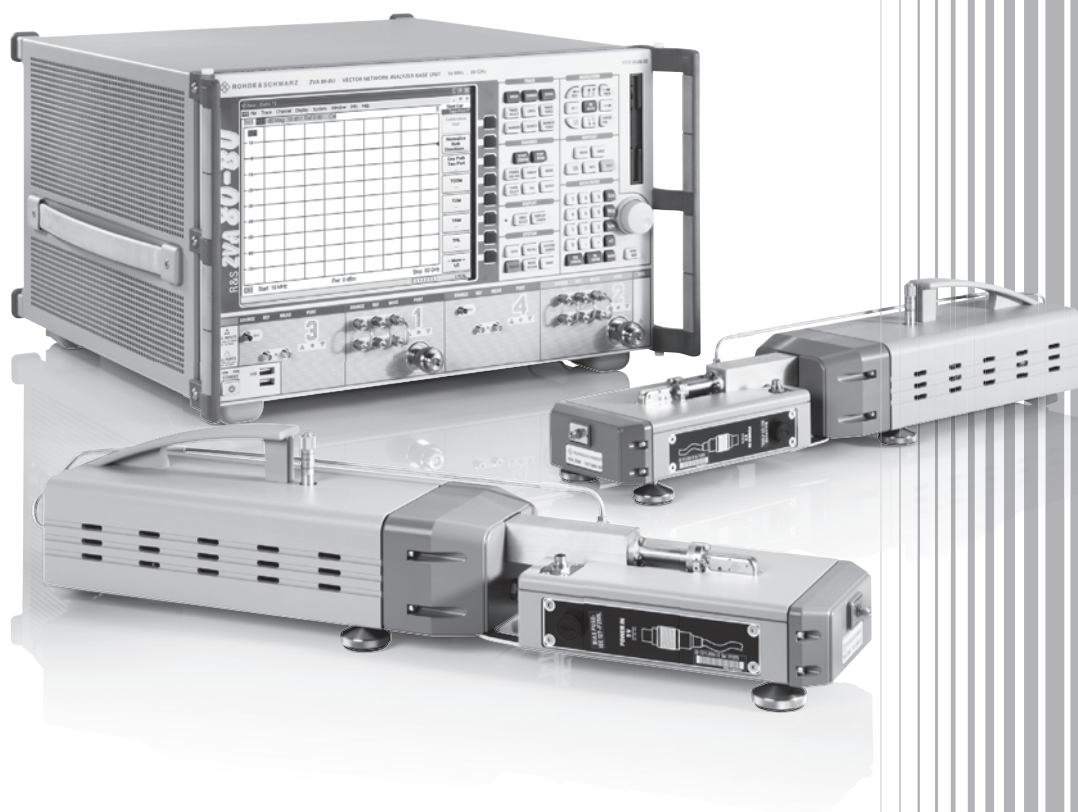

# CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications.....</b>	<b>4</b>
Overview .....	4
Measurement range.....	5
Test port output.....	5
Test port input.....	7
System characteristics .....	7
Additional front panel connectors.....	7
Display .....	7
Rear panel connectors.....	7
General data .....	9
<b>Ordering information .....</b>	<b>10</b>

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

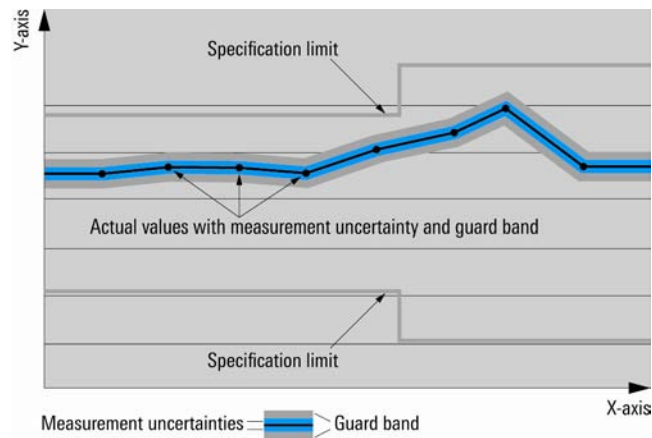

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

# Specifications

## Overview

The R&S®ZVA80 and R&S®ZVA110 are 1.0 mm vector network analyzer systems, covering the frequency range 10 MHz to 80 GHz and 10 MHz to 110 GHz respectively.

In case of R&S®ZVA80, the vector network analyzer system consists of

- one R&S®ZVA80-BU base unit and two external test sets, or
- one R&S®ZVA50 four port vector network analyzer (with -B16 and -K8 option) and two external test sets

Each of the external test sets is formed by a R&S®ZVA-Z75 frequency converter and a R&S®ZVA-ZD80 diplexer.

- The base unit can also be operated stand-alone in the frequency range 10 MHz to 50 GHz with 2.4 mm male test ports. Specifications relevant to this operating mode can be found in the R&S®ZVA data sheet PD 5213.5680.22. The R&S®ZVA80-BU allows one- or two-port operations

The system can also be operated without the diplexers R&S®ZVA-ZD80, yielding a two port waveguide measurement system with a WR15 test port. Specifications relevant to this operating mode can be found in the R&S®ZVA-Zxx data sheet PD 5214.2033.22.

In case of R&S®ZVA110, the vector network analyzer system consists of

- one R&S®ZVA67 four port vector network analyzer (with -B16 and -K8 option) and two external test sets

Each of the external test sets is formed by a R&S®ZVA-Z110E frequency converter and a R&S®ZVA-ZD110 diplexer

- the system can also be operated without the R&S®ZVA-ZD110 diplexers, yielding a two port waveguide measurement system with a WR10 test port. Specifications relevant to this operating mode can be found in the R&S®ZVA-Zxx data sheet PD 5214.2033.22


The following specifications apply for operation as a 1.0 mm vector network analyzer system. The specified data is only valid for a system configuration identical to the designation scheme at the rear panel of the R&S®ZVA80-BU, the R&S®ZVA50, or the R&S®ZVA67, with respect to the type and serial numbers as well as the correct position on the "right" or "left" side of the system. The position "left" is operated by ports 1 and 3 and position "right" by ports 2 and 4.

## Measurement range


Impedance		50 Ω
Test port connector		1.0 mm, male
Number of test ports		2
Frequency range	R&S®ZVA80	10 MHz to 80 GHz
	R&S®ZVA110	10 MHz to 110 GHz
Static frequency accuracy	without optional oven quartz	$8 \times 10^{-6}$
	with optional oven quartz	$1 \times 10^{-7}$
Frequency resolution		1 Hz
Number of measurement points	user-selectable	1 to 60001
Measurement bandwidths	1/2/5 steps	1 Hz to 1 MHz
Dynamic range of R&S®ZVA80	10 MHz to 50 MHz	> 76 dB, typ. 86 dB
	50 MHz to 500 MHz	> 91 dB, typ. 101 dB
	500 MHz to 2 GHz	> 111 dB, typ. 121 dB
	2 GHz to 20 GHz	> 116 dB, typ. 126 dB
	20 GHz to 24 GHz	> 111 dB, typ. 121 dB
	24 GHz to 32 GHz	> 106 dB, typ. 116 dB
	32 GHz to 40 GHz	> 101 dB, typ. 111 dB
	40 GHz to 45 GHz	> 96 dB, typ. 106 dB
	45 GHz to 55 GHz	> 75 dB, typ. 85 dB
	55 GHz to 75 GHz	> 87 dB, typ. 102 dB
	75 GHz to 80 GHz	> 80 dB, typ. 90 dB
Dynamic range of R&S®ZVA110	10 MHz to 50 MHz	> 50 dB, typ. 60 dB
	50 MHz to 500 MHz	> 90 dB, typ. 103 dB
	500 MHz to 2 GHz	> 113 dB, typ. 123 dB
	2 GHz to 20 GHz	> 120 dB, typ. 130 dB
	20 GHz to 24 GHz	> 110 dB, typ. 120 dB
	24 GHz to 32 GHz	> 106 dB, typ. 116 dB
	32 GHz to 40 GHz	> 97 dB, typ. 110 dB
	40 GHz to 50 GHz	> 87 dB, typ. 105 dB
	50 GHz to 60 GHz	> 80 dB, typ. 94 dB
	60 GHz to 75 GHz	> 75 dB, typ. 85 dB
	75 GHz to 110 GHz	> 80 dB, typ. 89 dB
The dynamic range is defined as the difference between the actually available maximum source power and the RMS value of the data trace of the transmission magnitude, which is produced by noise and crosstalk with the test ports short-circuited. The specification is valid without system error correction and at 10 Hz measurement bandwidth. The dynamic range can be increased by using a measurement bandwidth of 1 Hz.		

## Test port output


Output power of R&S®ZVA80	10 MHz to 50 MHz	-35 dBm to +5 dBm, electrically adjust.
	50 MHz to 20 GHz	-35 dBm to +8 dBm, electrically adjust.
	20 GHz to 32 GHz	-35 dBm to +4 dBm, electrically adjust.
	32 GHz to 50 GHz	-35 dBm to -5 dBm, electrically adjust.
	50 GHz to 80 GHz	-28 dBm to -8 dBm, mechanically adjust.
Output power of R&S®ZVA110	10 MHz to 50 MHz	-30 dBm to +5 dBm, electrically adjust.
	50 MHz to 500 MHz	-30 dBm to +6 dBm, electrically adjust.
	500 MHz to 20 GHz	-30 dBm to +8 dBm, electrically adjust.
	20 GHz to 32 GHz	-30 dBm to +3 dBm, electrically adjust.
	32 GHz to 50 GHz	-30 dBm to -4 dBm, electrically adjust.
	50 GHz to 60 GHz	-35 dBm to -12 dBm, electrically adjust.
	60 GHz to 67 GHz	-37 dBm to -17 dBm, electrically adjust.
	67 GHz to 75 GHz	-30 dBm to -17 dBm, electrically adjust.
	75 GHz to 110 GHz	-28 dBm to -11 dBm, electrically adjust.
Output power accuracy of R&S®ZVA80 (with power calibration)	500 MHz to 24 GHz	<0.8 dB, typ. 0.3 dB
	24 GHz to 50 GHz	<2 dB, typ. 0.8 dB
	50 GHz to 80 GHz	N/A
Output power accuracy of R&S®ZVA110 (with power calibration)	500 MHz to 24 GHz	< 0.8 dB, typ. 0.3 dB
	24 GHz to 67 GHz	< 2 dB, typ. 1 dB
	67 GHz to 110 GHz	< 3 dB, typ. 2 dB

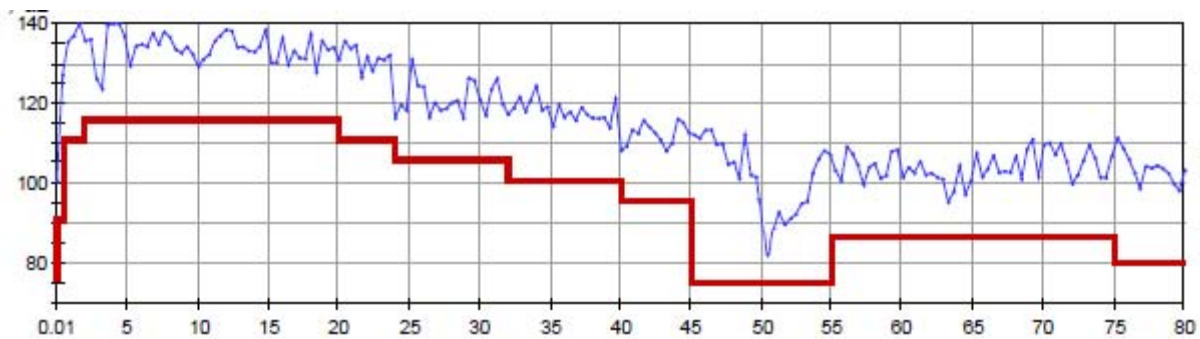


Dynamic range in dB versus frequency in GHz of the R&S<sup>®</sup>ZVA80.

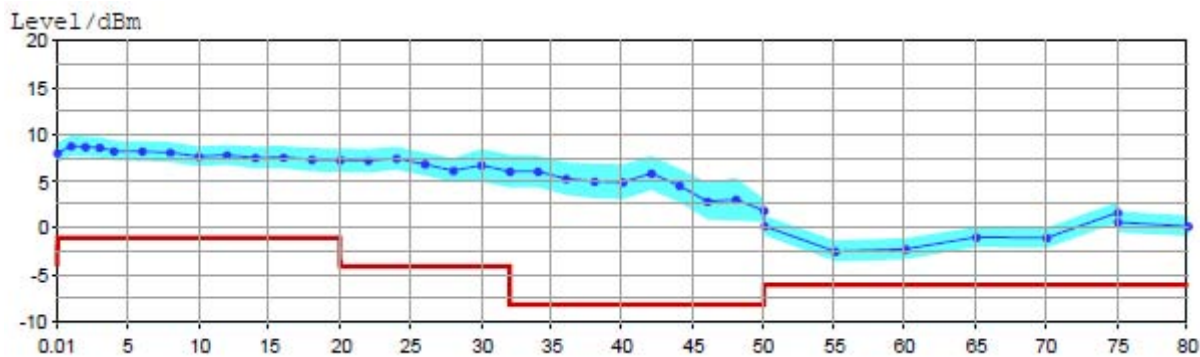

Maximum output power in dBm versus frequency in GHz of the R&S<sup>®</sup>ZVA80.

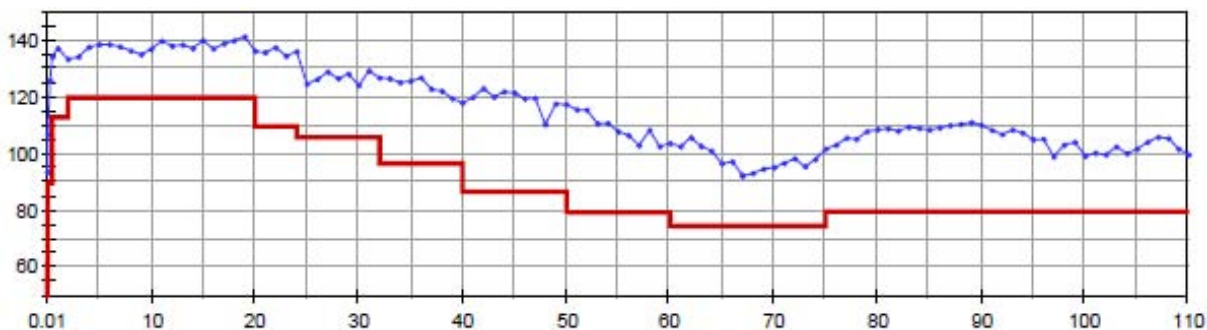

Dynamic range in dB versus frequency in GHz of the R&S<sup>®</sup>ZVA110.

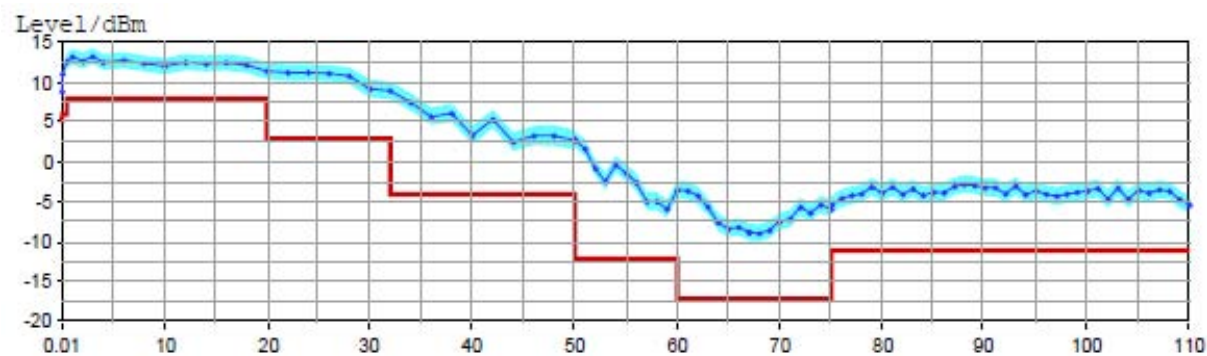

Maximum output power in dBm versus frequency in GHz of the R&S<sup>®</sup>ZVA110.

## Test port input

Damage level	+27 dBm
--------------	---------

## System characteristics

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 K after calibration. The data is based on a measurement bandwidth of 10 Hz and system error calibration by means of a suitable calibration kit. Frequency points, measurement bandwidth, and sweep time have to be identical for measurement and calibration (no interpolation allowed).

System characteristics of R&S® ZVA80		
Trace stability (transmission of the through standard)	10 MHz to 80 GHz	typ. < 0.4 dB and typ. < 4°
Effective source match (with system error correction)	10 MHz to 80 GHz	typ. > 32 dB
Effective directivity (with system error correction)	10 MHz to 80 GHz	typ. > 32 dB
Effective load match (with system error correction)	10 MHz to 80 GHz	typ. > 32 dB
System characteristics of R&S® ZVA110		
Trace stability (transmission of the through standard)	10 MHz to 110 GHz	typ. < 0.4 dB and typ. < 4°
Effective source match (with system error correction)	10 MHz to 110 GHz	typ. > 32 dB
Effective directivity (with system error correction)	10 MHz to 110 GHz	typ. > 32 dB
Effective load match (with system error correction)	10 MHz to 110 GHz	typ. > 32 dB

## Additional front panel connectors

USB	(two) universal serial bus connectors for connecting USB devices (USB 2.0); two additional USB connectors at the rear panel
-----	--

## Display

Screen	26 cm (10.4") diagonal color LCD
Resolution	800 × 600 × 262144 pixel (high color)

## Rear panel connectors

IEC BUS	remote control in line with IEEE 488, IEC 60625; 24 pins
LAN 1	first local area network connector, 8 pins, RJ-45
LAN 2	second local area network connector, 8 pins, RJ-45
USB	(two) universal serial bus connectors for connecting USB devices (USB 2.0); two additional USB connectors at the front panel

<b>10 MHz REF</b>	alternatively input or output for external frequency reference signal	
Connector type		BNC, female
Input frequency		10 MHz
Maximum permissible deviation		1 kHz
Input power		-3 dBm ± 8 dB
Input impedance		50 Ω
Output frequency		10 MHz
Output frequency accuracy		80 Hz
Output power		-3 dBm ± 8 dB at 50 Ω

<b>DC MEAS 1 V</b>	DC measurement input	
Connector type		4-pin mini DIN, female
Voltage range		-1 V to +1 V
Measurement accuracy		2.5 % of reading + 2.5 mV
Resolution		12 bit
Sample rate		3 MHz
Input impedance		> 10 k $\Omega$
Damage voltage		30 V

<b>DC MEAS 10 V</b>	DC measurement input	
Connector type		4-pin mini DIN, female
Voltage range		-10 V to +10 V
Measurement accuracy		2.5 % of reading + 25 mV
Resolution		12 bit
Sample rate		3 MHz
Input impedance		> 10 k $\Omega$
Damage voltage		30 V

<b>PORT BIAS</b>	DC bias input for 1.0 mm PORT	
Connector type		BNC, female
Maximum nominal input voltage		30 V
Maximum nominal input current		200 mA
Damage voltage		30 V
Damage current		500 mA

<b>MONITOR</b>		IBM-PC-compatible VGA monitor connector, 15-pin D-Sub (for external monitor)
----------------	--	--

<b>USER CONTROL</b>	several control and trigger signals, 25-pin D-Sub, 3.3 V TTL for controlling external generators, for limit checks, sweep signals, etc.	
FOOT SWITCH 1 and FOOT SWITCH 2	pin 24 and pin 25 (inputs)	control inputs
DRIVE PORT 1 to DRIVE PORT 4	pin 16 to pin 19 (outputs)	indicate driving port
CHANNEL BIT 0 and CHANNEL BIT 1	pin 8 and pin 9 (outputs)	not available
CHANNEL BIT 2 and CHANNEL BIT 3	pin 10 and pin 11 (outputs)	channel-specific user-configurable bits
PASS 1 and PASS 2	pin 13 and pin 14 (outputs)	pass/fail results of limit checks
BUSY	pin 4 (output)	measurements running
READY FOR TRIGGER	pin 6 (output)	ready for trigger
EXT GEN TRIGGER	pin 21 (output)	control signal for external generator
EXT GEN BLANK	pin 22 (input)	handshake signal from external generator
EXTERNAL TRIGGER	pin 2 (input)	trigger input for analyzer

<b>EXT TRIGGER</b>	trigger input for analyzer	
Connector type		BNC, female
TTL signal (edge-triggered)		3 V
Polarity (user-selectable)		positive or negative
Minimum pulse width		1 $\mu$ s
Input impedance		> 10 k $\Omega$



## General data

Temperature loading	in line with IEC 60068-2-1 and IEC 60068-2-2	
	operating temperature range	+18 °C to +28 °C
	permissible temperature range	+5 °C to +40 °C
	storage temperature range	-40 °C to +70 °C
Damp heat		+40 °C at 80 % rel. humidity, in line with IEC 60068-2-30
Mechanical resistance	vibration, sinusoidal	5 Hz to 150 Hz, in line with IEC 60068-2-6
	vibration, random	10 Hz to 300 Hz, in line with IEC 60068-2-64
	shock	40 g shock spectrum, in line with MIL-STD-810E Method No. 516.4 procedure I
Calibration interval		1 year
EMC, RF emission	in line with EN 55011 class A, operation is not covered in residential, commercial, and business areas nor in small-size companies. Thus, the instrument must not be operated in residential, commercial, and business areas nor in small-size companies unless additional measures are taken to ensure that EN 55011 class B is met.	in line with CISPR 11/EN 55011 group 1 class A (for a shielded test setup) The instrument complies with the emission requirements stipulated by EN 55011 and EN 61326-1 class A. This means that the instrument is suitable for use in industrial environments.
EMC, immunity		in line with IEC/EN 61326-1, immunity for industrial environments (excluding operating frequency)
Safety		in line with IEC 61010-1, EN 61010-1 and UL 3111-1
Power supply	R&S®ZVA80-BU or R&S®ZVA50	100 V to 240 V (AC) with tolerance ±10 %, 50 Hz to 60 Hz with tolerance ±5 %, safety class I to VDE 411
	each external test set (consisting of R&S®ZVA-Z75 and R&S®ZVA-ZD80)	power adapter, 100 V to 240 V (AC) with tolerance ±10 %, 50 Hz to 60 Hz with tolerance ±5 %, safety class II output: 9 V, max. 1.1 A DC output connector: DIN 45323
Power consumption	R&S®ZVA80-BU or R&S®ZVA50	450 W, typ. 310 W (standby: typ. 10 W)
	each external test set (consisting of R&S®ZVA-Z75 and R&S®ZVA-ZD80)	10 W, typ. 7 W
Dimensions (W x H x D)	R&S®ZVA80-BU or R&S®ZVA50	465.1 mm x 286.2 mm x 495.0 mm (18.31 in x 11.27 in x 19.49 in)
	each external test set (consisting of R&S®ZVA-Z75 and R&S®ZVA-ZD80)	525 mm x 110 mm x 114 mm (20.7 in x 4.3 in x 4.5 in)
Weight	R&S®ZVA80-BU or R&S®ZVA50	25 kg (55 lb)
	each external test set (consisting of R&S®ZVA-Z75 and R&S®ZVA-ZD80)	4.2 kg (9.3 lb)
Shipping weight	R&S®ZVA80-BU or R&S®ZVA50	37 kg (82 lb)
	each external test set (consisting of R&S®ZVA-Z75 and R&S®ZVA-ZD80)	6.2 kg (13.6 lb)

## Ordering information

Designation	Type	Order No.
Vector Network Analyzer, 80 GHz, two ports, complete system based on R&S®ZVA80-BU	R&S®ZVA80	1312.6750.02
Vector Network Analyzer, 80 GHz, two ports, complete system based on R&S®ZVA50	R&S®ZVA80	1312.6750.03
Vector Network Analyzer, 110 GHz, two ports, complete system based on R&S®ZVA67	R&S®ZVA110	1312.7004.03
<b>Options</b>		
Time Domain	R&S®ZVAB-K2	1164.1657.02
Pulsed Measurements	R&S®ZVA-K7	1164.1511.02
5 MHz Receiver Bandwidth	R&S®ZVA-K17	1164.1070.02
Internal Pulse Generators	R&S®ZVA-K27	1164.1892.02
<b>Service options of R&amp;S®ZVA80</b>		
One-Year Repair Service following the warranty period	R&S®RO2ZVA80	please contact your local Rohde & Schwarz sales office
Two-Year Repair Service following the warranty period	R&S®RO3ZVA80	
Four-Year Repair Service following the warranty period	R&S®RO5ZVA80	
Two-Year Calibration Service	R&S®CO2ZVA80	
Three-Year Calibration Service	R&S®CO3ZVA80	
Five-Year Calibration Service	R&S®CO5ZVA80	
<b>Service options of R&amp;S®ZVA110</b>		
One-Year Repair Service following the warranty period	R&S®RO2ZVA110	please contact your local Rohde & Schwarz sales office
Two-Year Repair Service following the warranty period	R&S®RO3ZVA110	
Four-Year Repair Service following the warranty period	R&S®RO5ZVA110	
Two-Year Calibration Service	R&S®CO2ZVA110	
Three-Year Calibration Service	R&S®CO3ZVA110	
Five-Year Calibration Service	R&S®CO5ZVA110	

For product brochure, see PD 5213.5680.12 and [www.rohde-schwarz.com](http://www.rohde-schwarz.com).



## Service you can rely on

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

## Environmental commitment

- | Energy-efficient products
- | Continuous improvement in environmental sustainability
- | ISO 14001-certified environmental management system

Certified Quality System  
**ISO 9001**

## Rohde & Schwarz GmbH & Co. KG

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

### Regional contact

Europe, Africa, Middle East

+49 89 4129 123 45

[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)

North America

1 888 TEST RSA (1 888 837 87 72)

[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)

Latin America

+1 410 910 79 88

[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)

Asia/Pacific

+65 65 13 04 88

[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners | Printed in Germany (as)

PD 5214.4813.22 | Version 02.00 | January 2011 | R&S®ZVA80

Subject to change

© 2011 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany



5214481322