

Wireless power transmission based on resonant electrical coupling

European Microwave Conference

Rome

October 7, 2014

Ricardo Dias Fernandes


João Nuno Matos

Nuno Borges Carvalho

Instituto de Telecomunicações


Departamento de Electrónica, Telecomunicações e Informática




Universidade de Aveiro

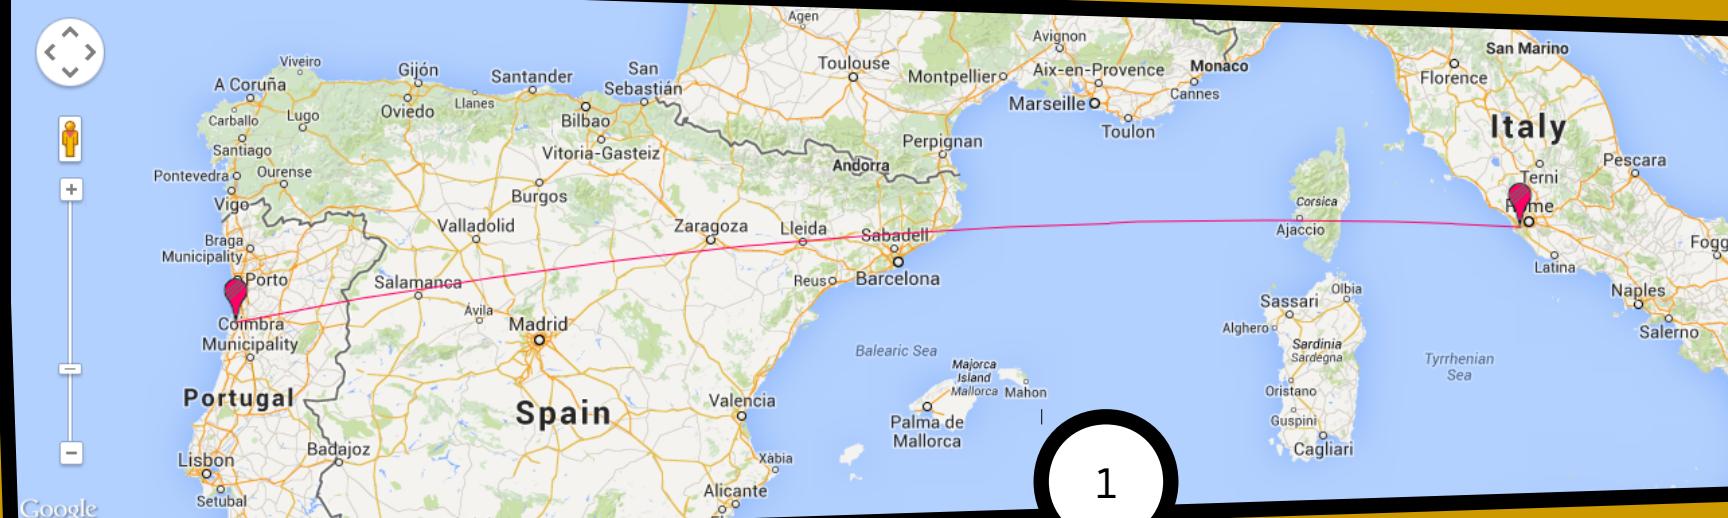

Resonant magnetic coupling (2007): 4 coils (largest diameter of 60 cm, cross-sectional diameter of 6 mm), a 60 W light bulb, distance of 2 m, efficiency of 40%

Balanced trade-off between efficiency, range, simplicity, size and power transfer capability

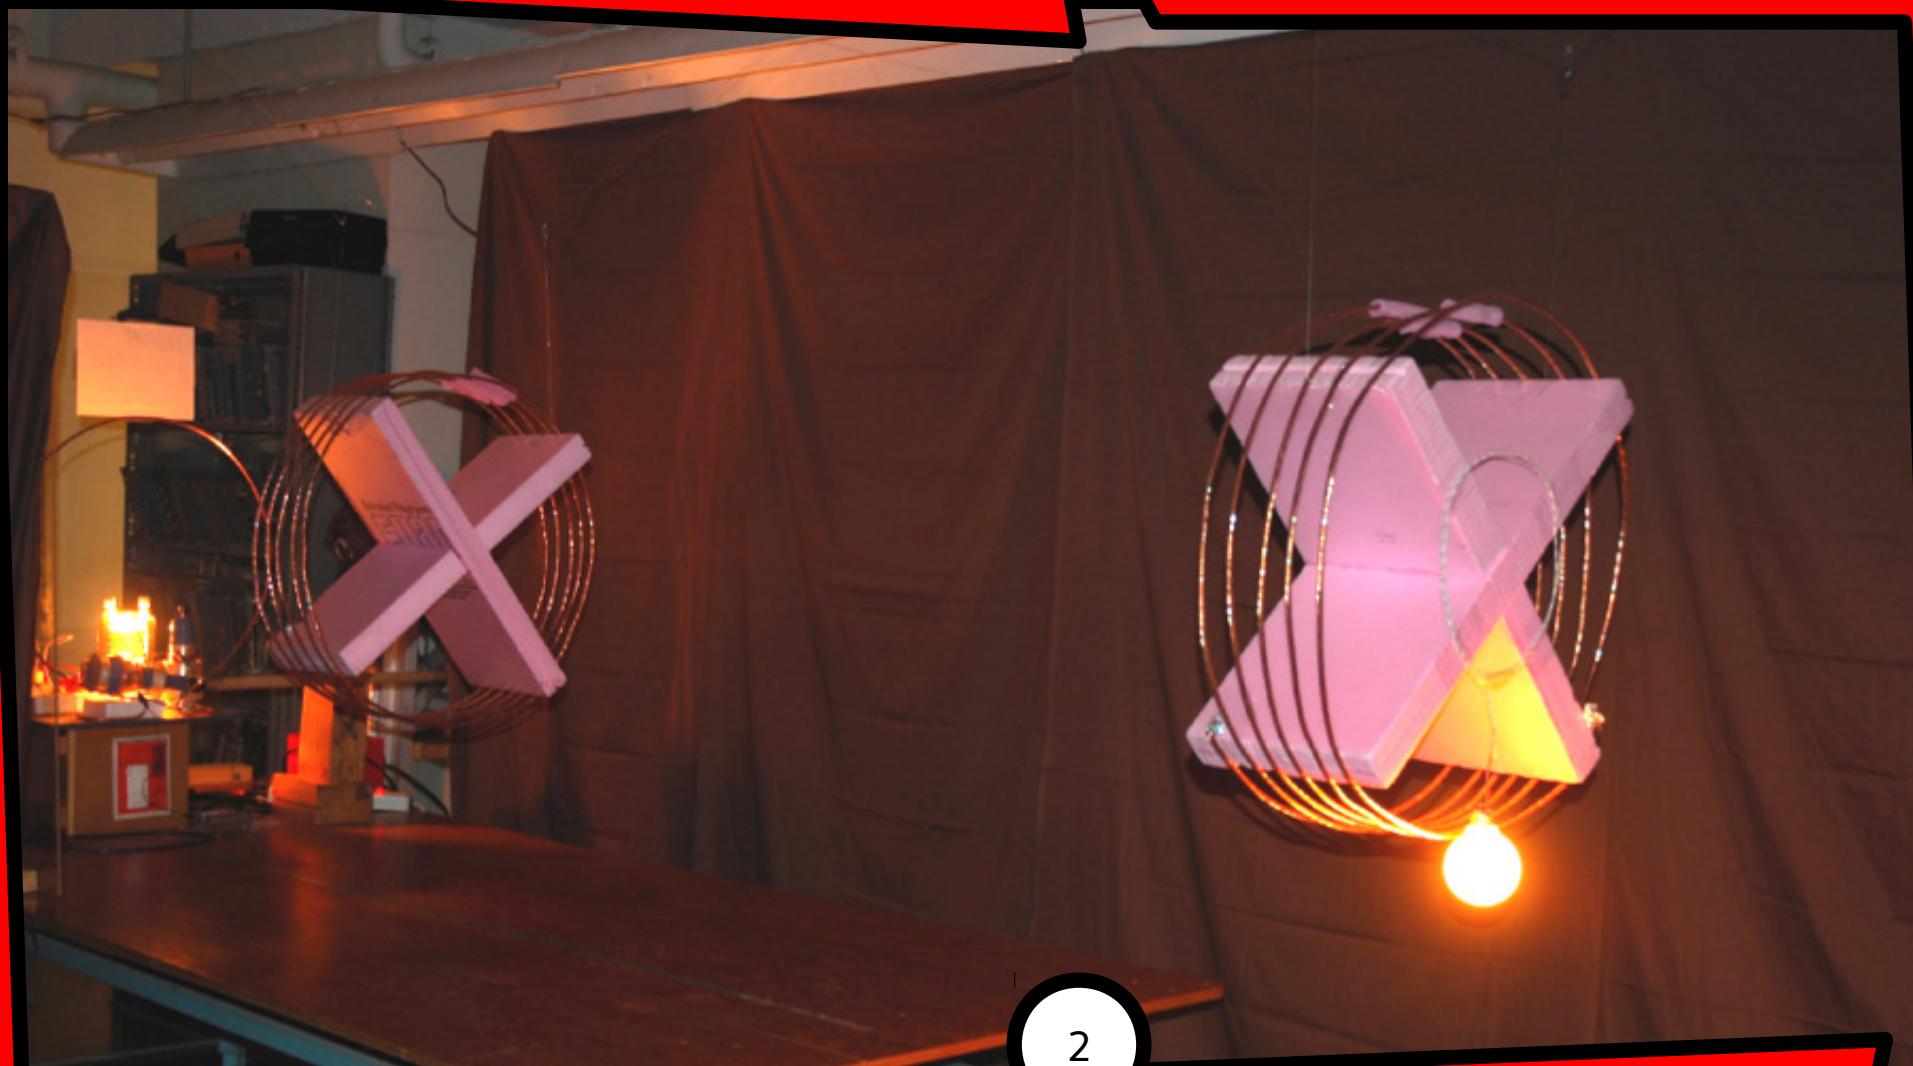

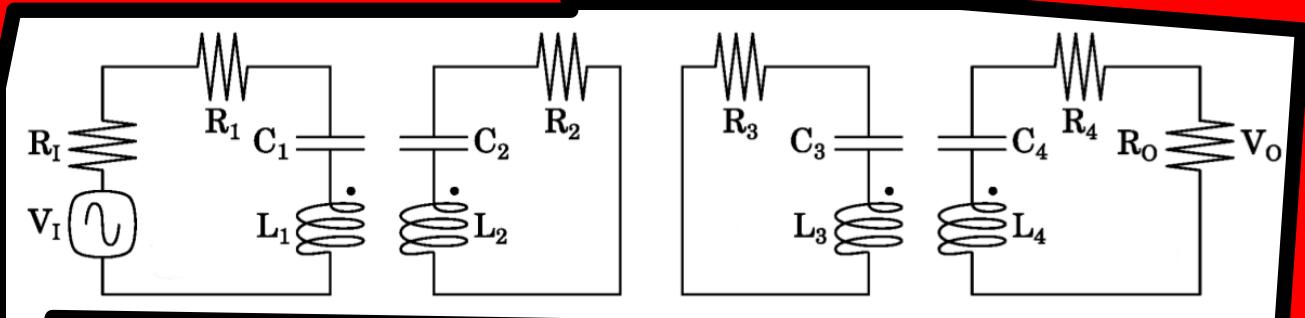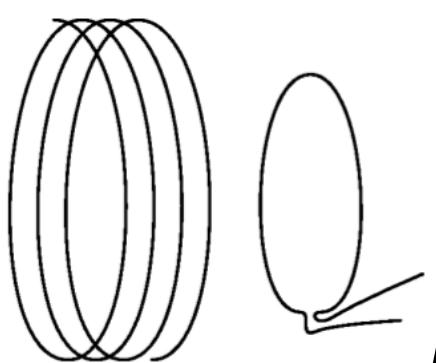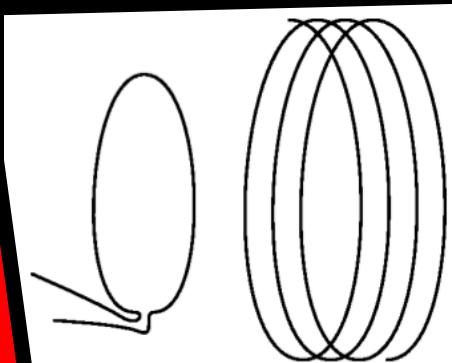

$$\frac{V_O}{V_I} = \frac{-jw^3 M_{12} M_{23} M_{34} R_O}{M_{12}^2 M_{34}^2 w^4 + Z_1 Z_2 Z_3 Z_4 + w^2 (M_{12}^2 Z_3 Z_4 + M_{23}^2 Z_1 Z_4 + M_{34}^2 Z_1 Z_2)}$$

$$Z_1 = R_I + R_1 - \frac{j}{w C_1} + j w L_1$$

$$Z_2 = R_2 - \frac{j}{w C_2} + j w L_2$$


$$Z_3 = R_3 - \frac{j}{w C_3} + j w L_3$$

$$Z_4 = R_O + R_4 - \frac{j}{w C_4} + j w L_4$$

$$M_{12} = k_{12} \sqrt{L_1 L_2}$$

$$M_{23} = k_{23} \sqrt{L_2 L_3}$$

$$M_{34} = k_{34} \sqrt{L_3 L_4}$$

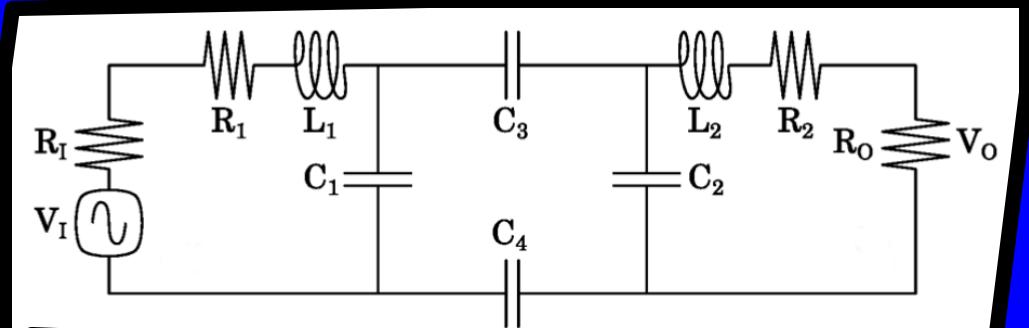

$$\frac{V_O}{V_I} = \frac{R_O Z_3}{Z_1 Z_2 \left(Z_3 \left[jw(C_1 + C_2) + \frac{1}{Z_1} + \frac{1}{Z_2} \right] - w^2 C_1 C_2 + jw \left[\frac{C_1 C_2}{Z_2 Z_1} \right] + \frac{1}{Z_1 Z_2} \right)}$$


$$Z_1 = R_I + R_1 + jwL_1$$

$$Z_2 = R_O + R_2 + jwL_2$$


$$Z_3 = jw \frac{C_3 C_4}{C_3 + C_4}$$

Available power gain:

$$\frac{P_O}{P_A} = \frac{4R_I}{R_O} \left| \frac{V_O}{V_I} \right|^2$$

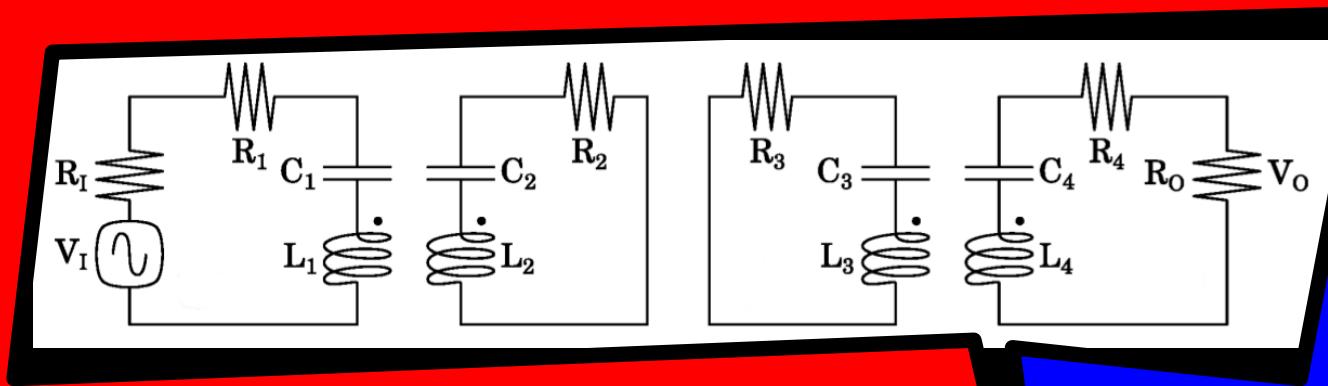



Parameter	Value
R_I, R_O	50Ω
R_1, R_4	2Ω
R_2, R_3	10Ω
L_1, L_4	$1 \mu\text{H}$
L_2, L_3	$28 \mu\text{H}$
C_1, C_4	140 pF
C_2, C_3	5 pF
K_{12}, k_{34}	0.1

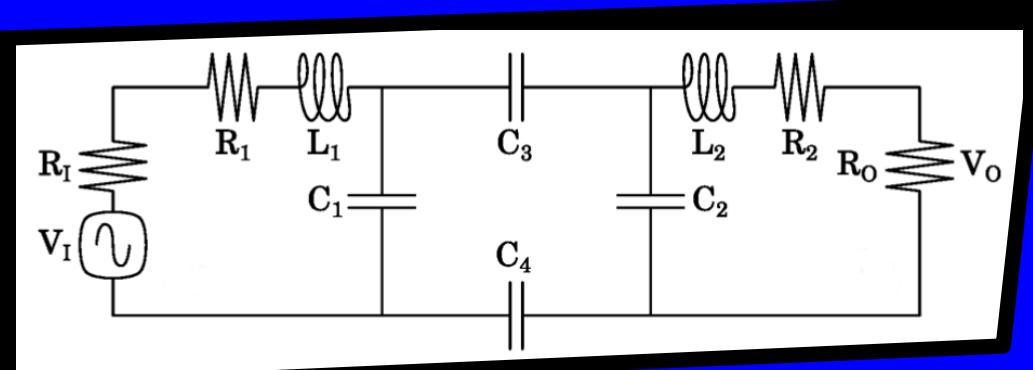


Parameter	Value
R_I, R_O	50Ω
R_1, R_2	12Ω
L_1, L_2	$28 \mu\text{H}$
C_1, C_2	5 pF

5

$C_4 = C_3$

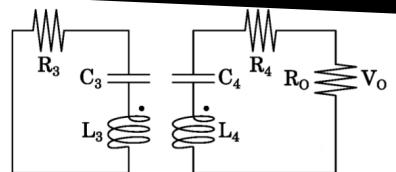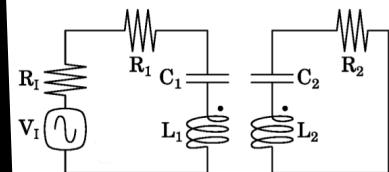

6

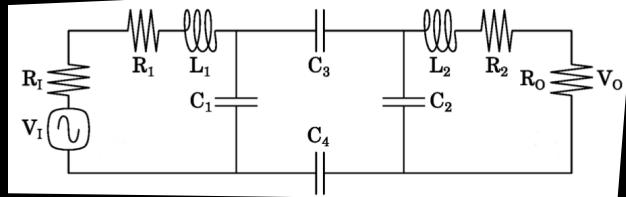

k_{23}

0.001

0.002

0.005

0.008

0.015

C_3 (pF)



0.02




0.04

0.06

0.1

0.18

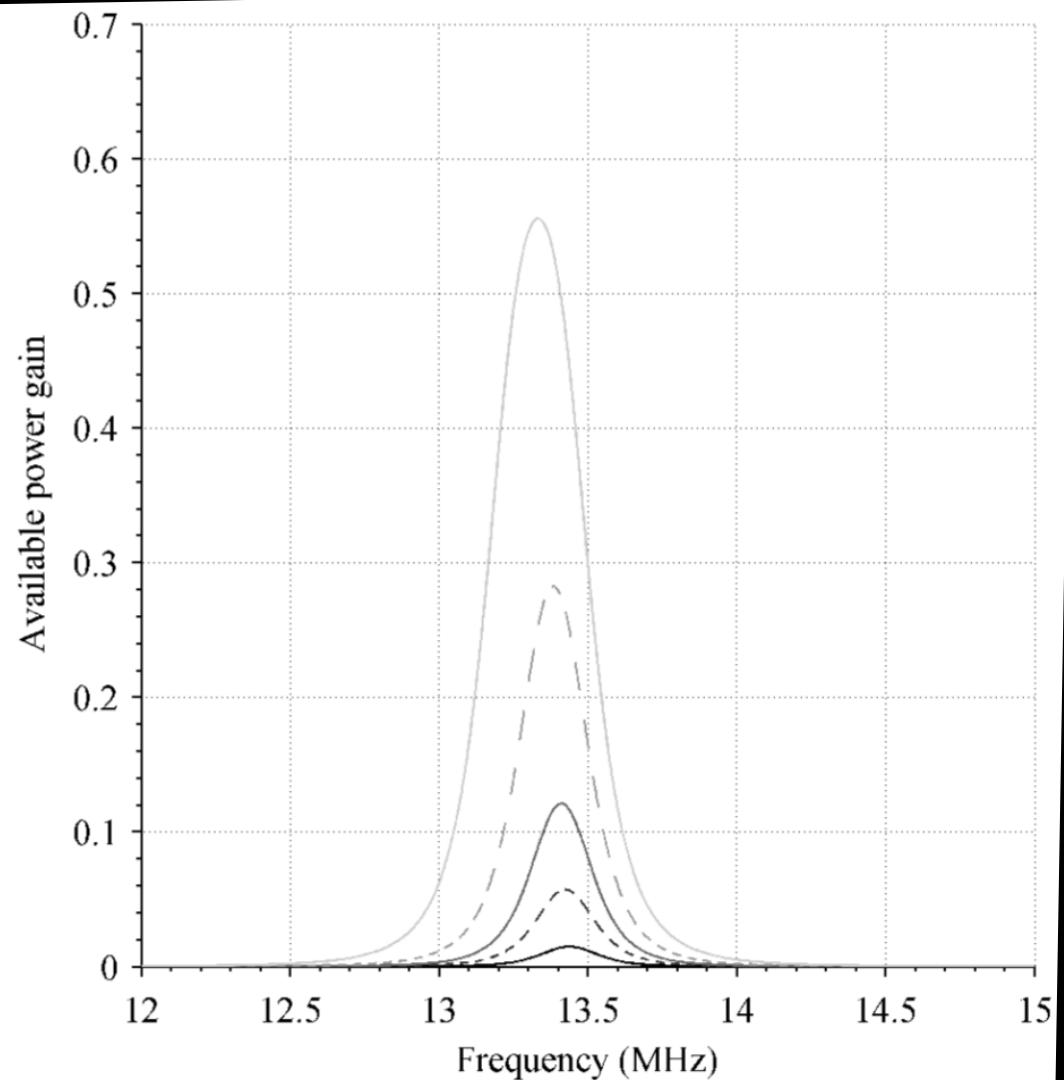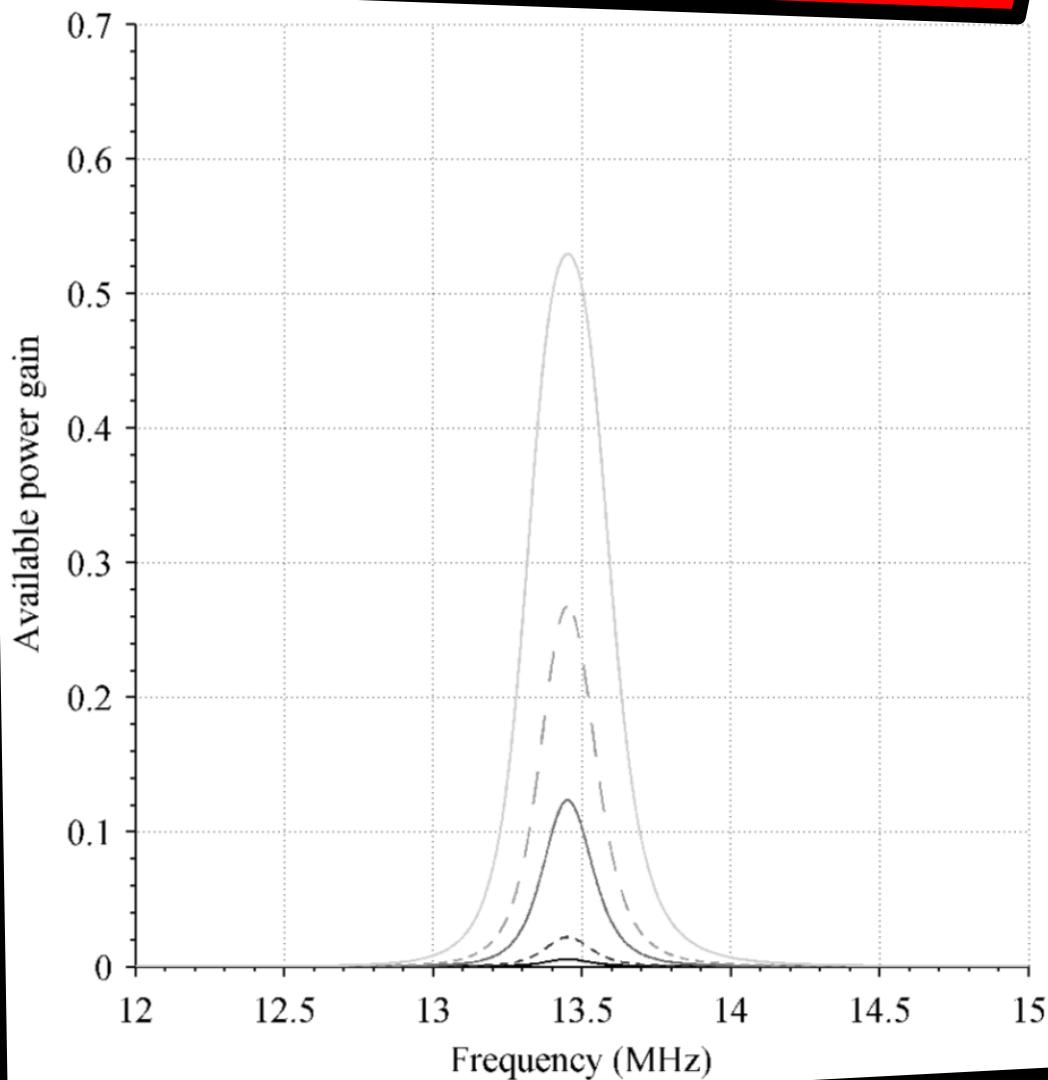

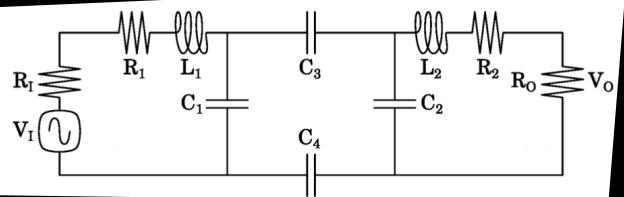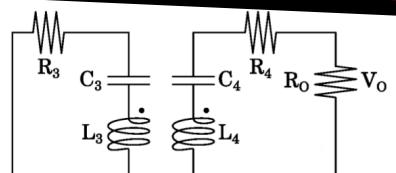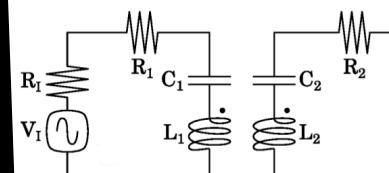

7

k_{23}

0.02

0.026

0.038

0.06

0.1

C_3 (pF)



0.22



0.3

0.4


0.7

1

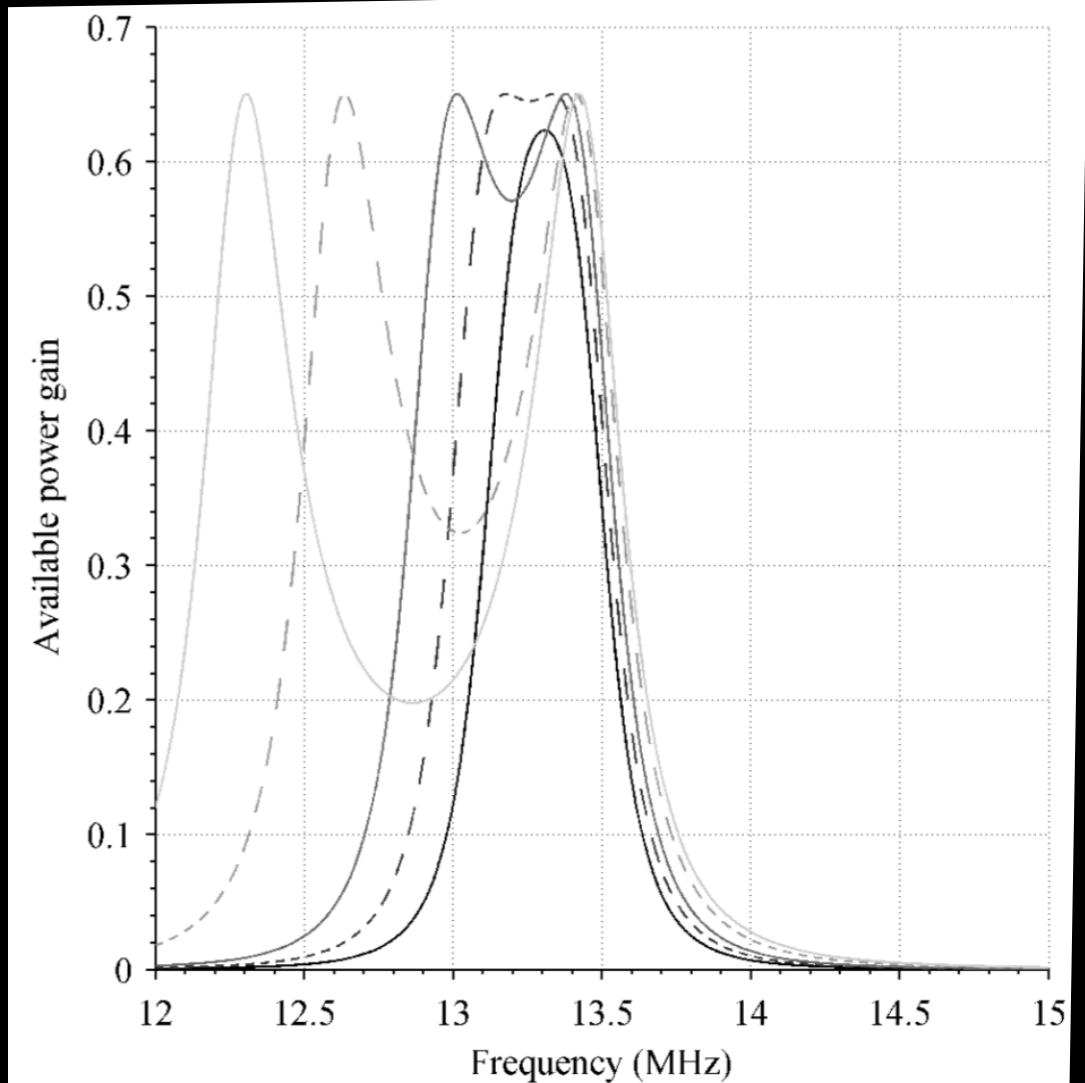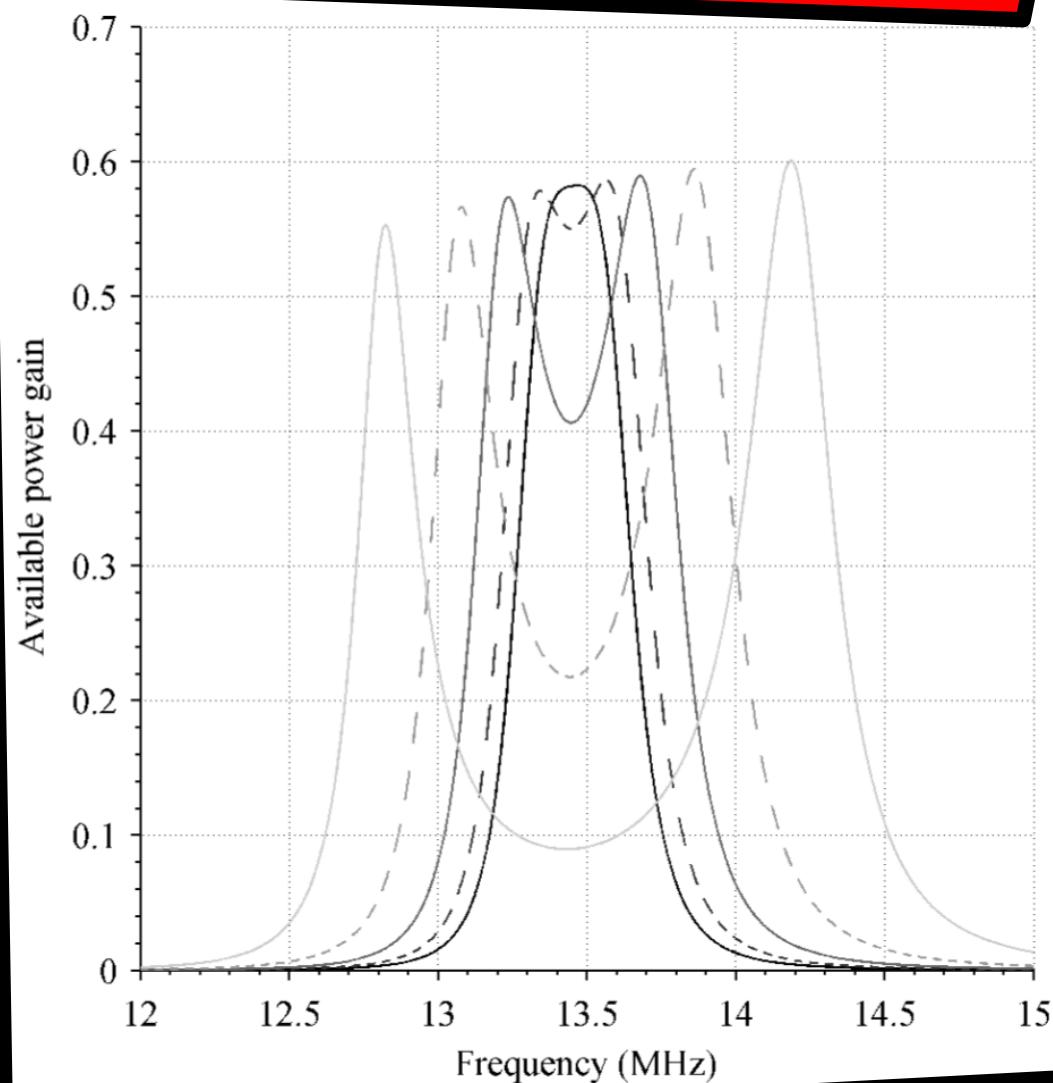

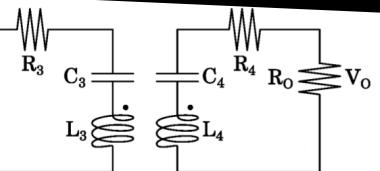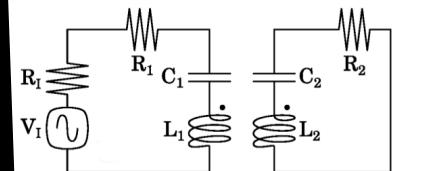

$$R_1 = R_2 = R_3 = R_4 = 0$$

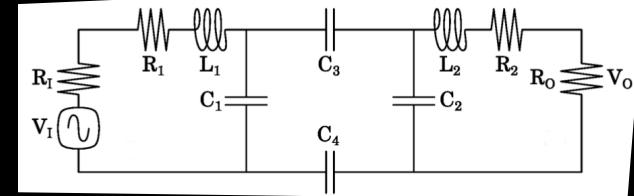

k_{23}

0.001

0.002

0.005

0.008

0.015

C_3 (pF)



0.02



0.04

0.06


0.1

0.18

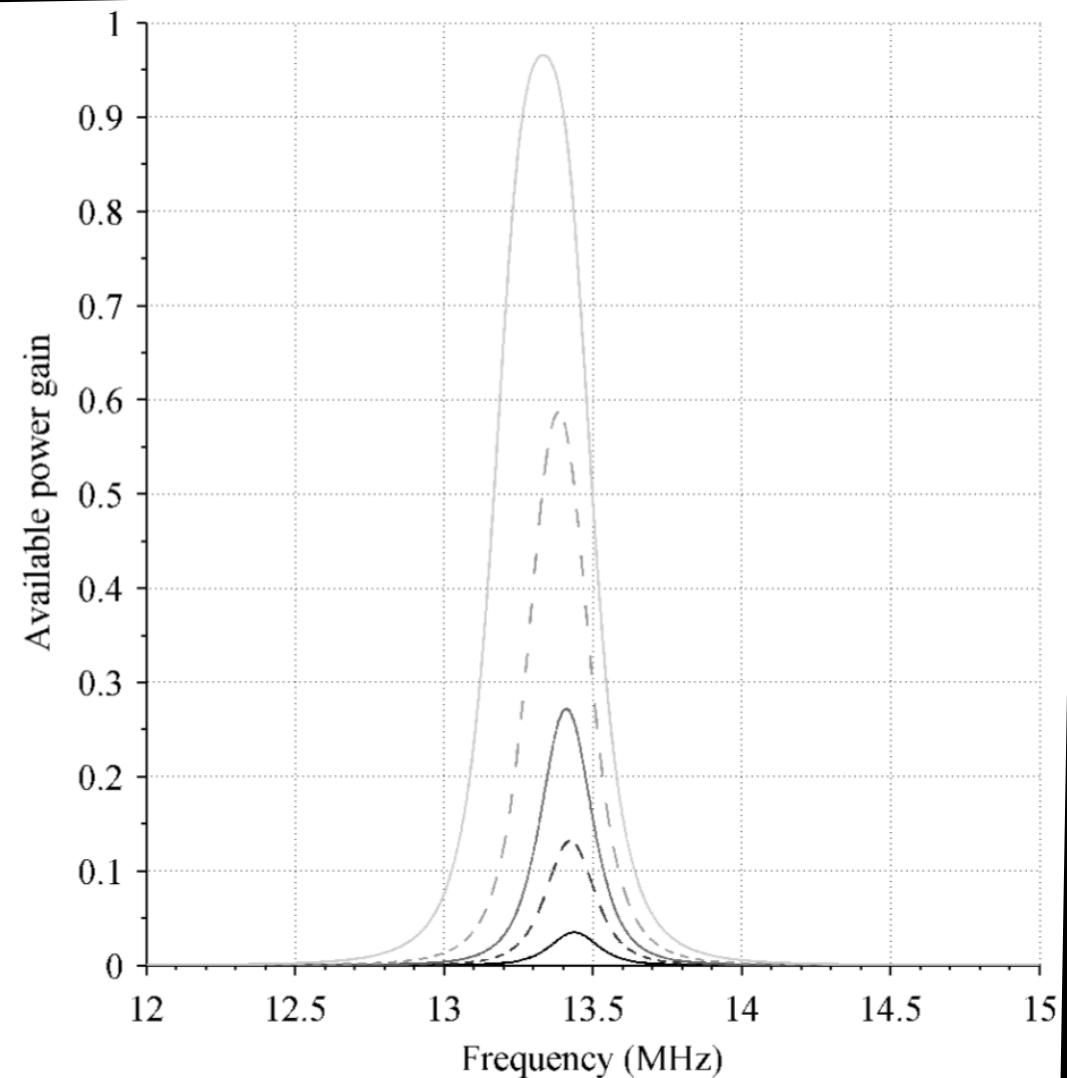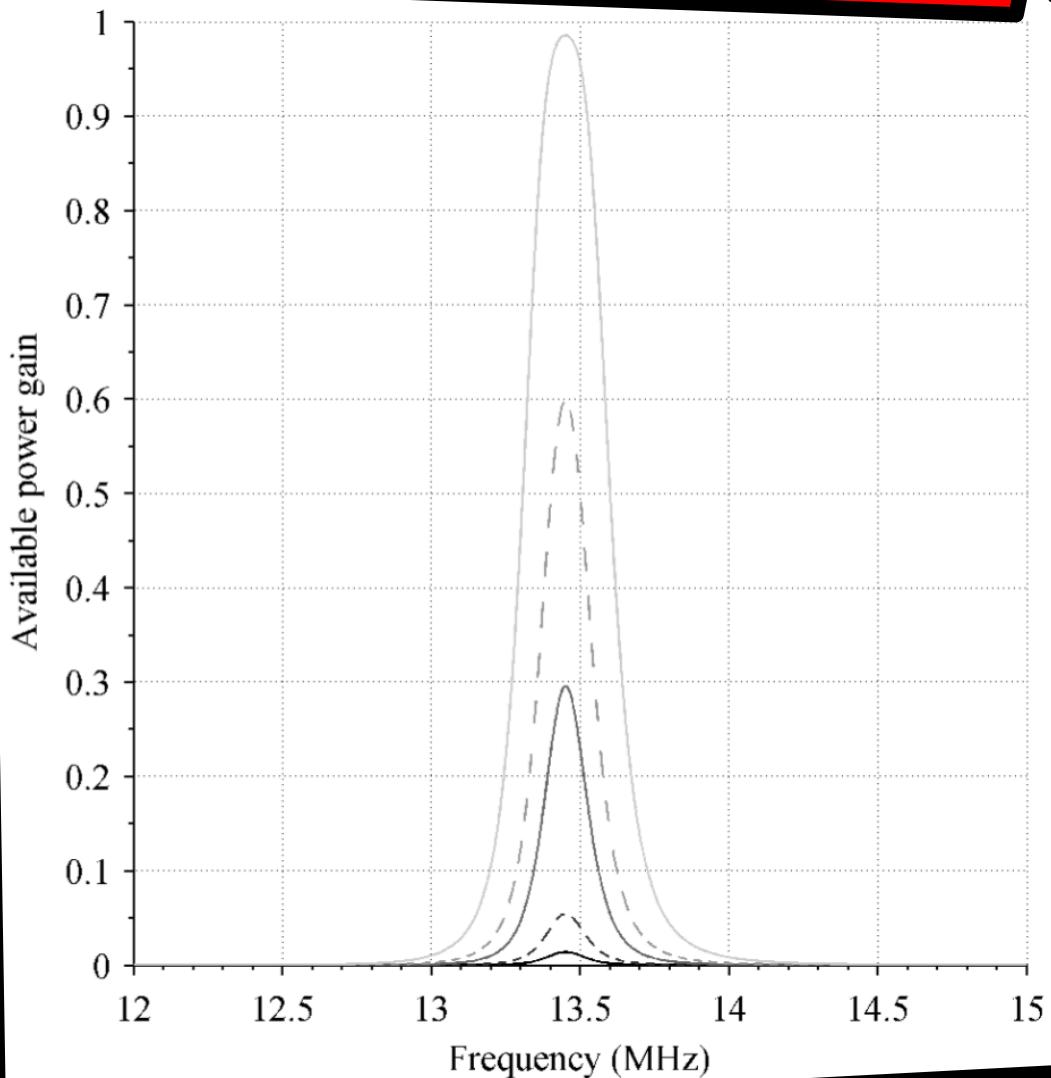

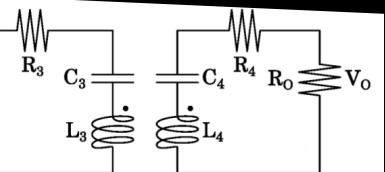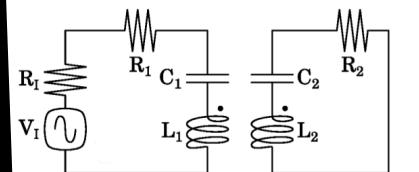

$$R_1 = R_2 = R_3 = R_4 = 0$$

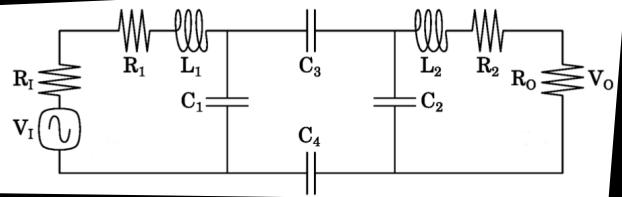

k_{23}

0.02

0.026

0.038

0.06

0.1

C_3 (pF)



0.22

0.3

0.4




0.7

1

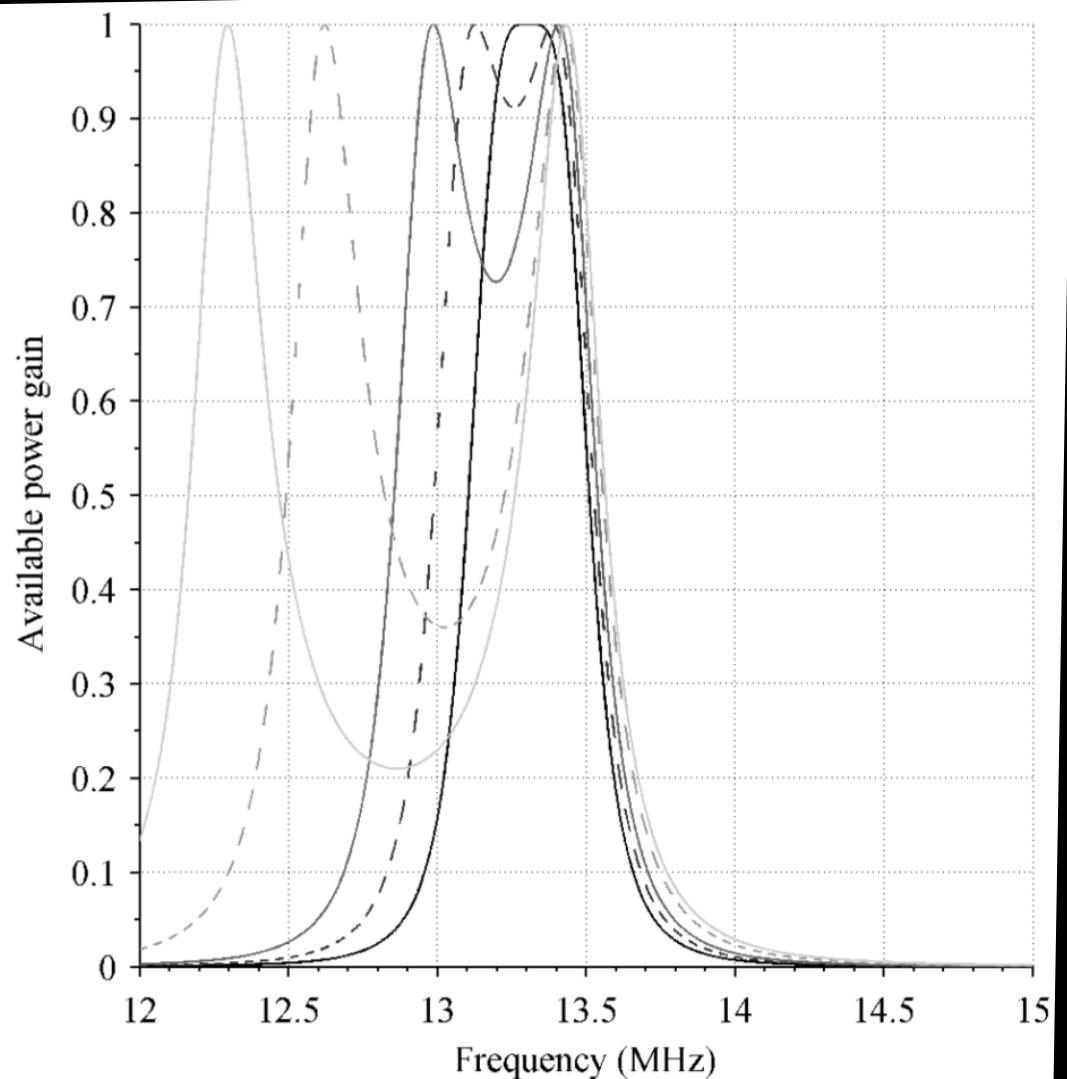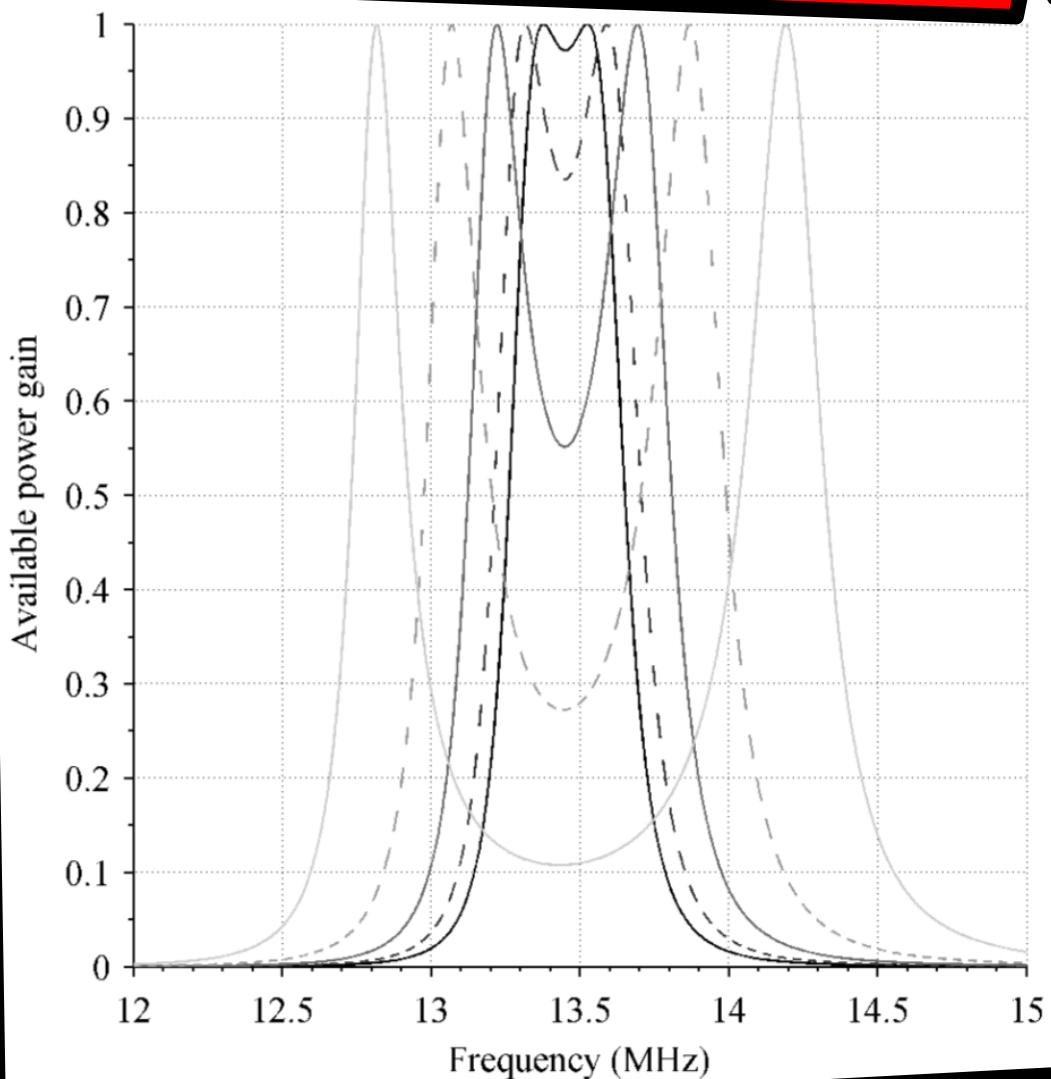

10

$$L_2 = 0.9 L_1$$

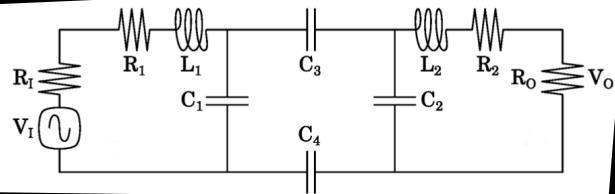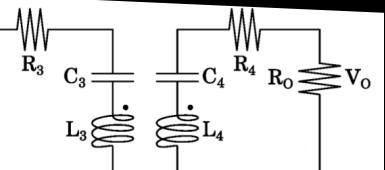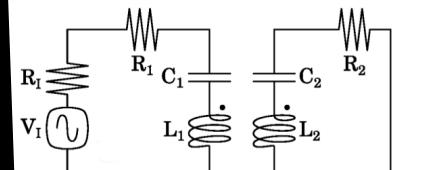 k_{23}

0.001

0.002

0.005

0.008

0.015

 C_3 (pF)



0.02

0.04




0.06

0.1

0.18

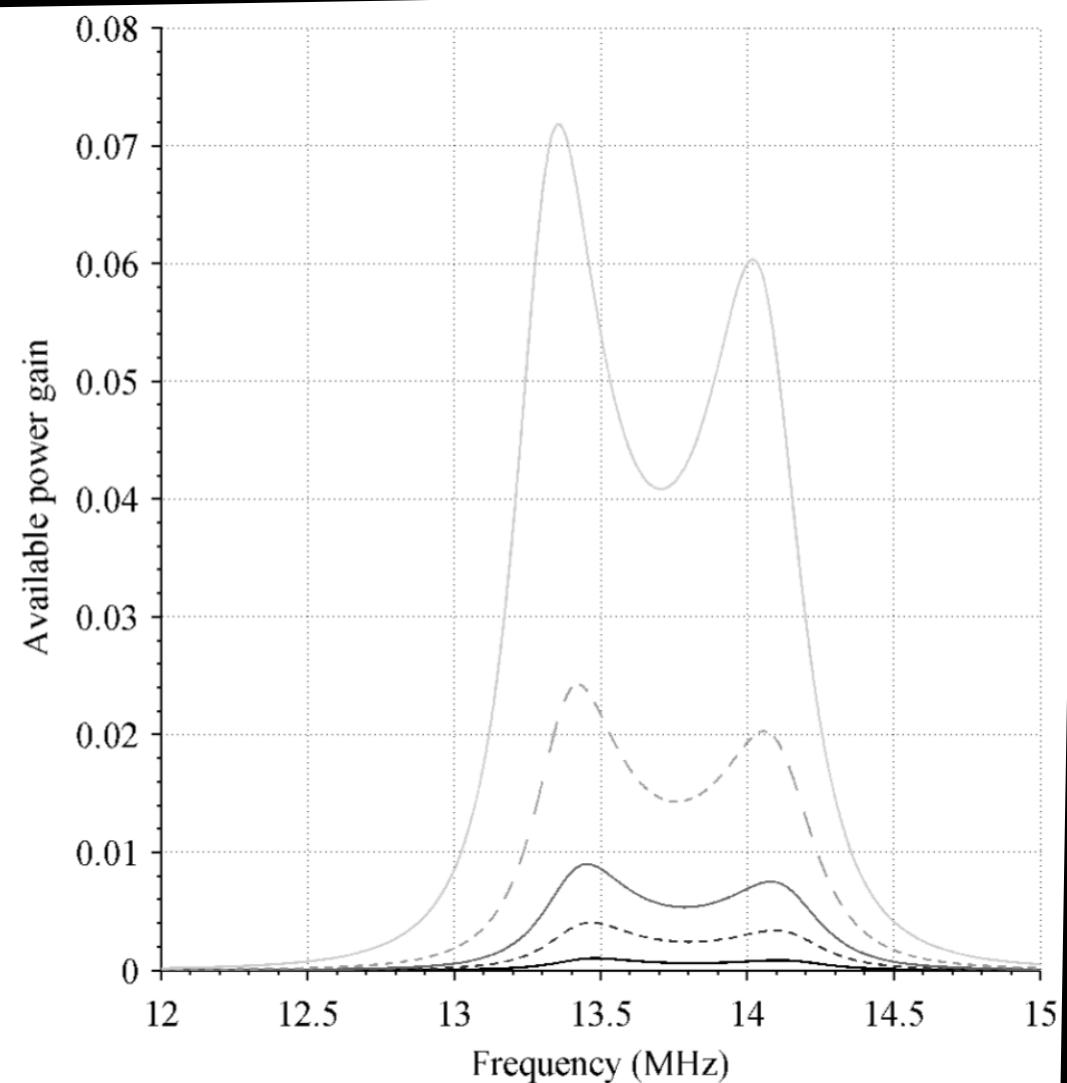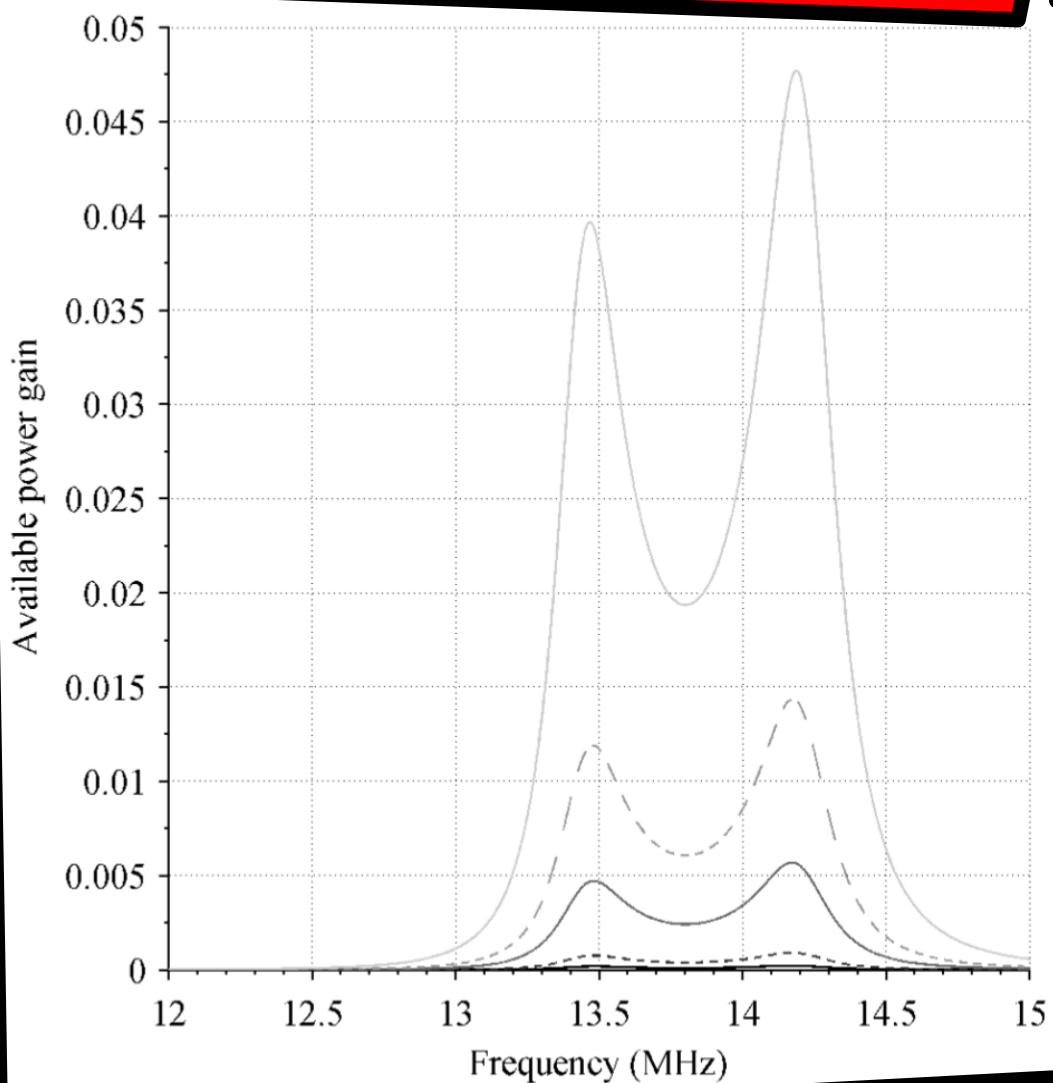

$$L_2 = 0.9 L_1$$

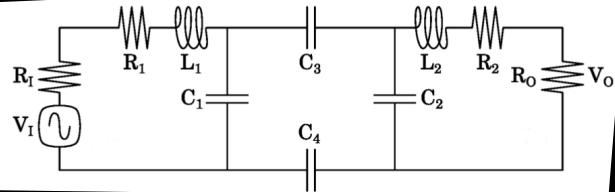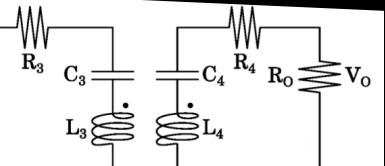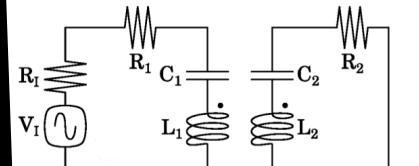

k_{23}

0.02

0.026

0.038

0.06

0.1

C_3 (pF)



0.22






0.3



0.4

0.7

1

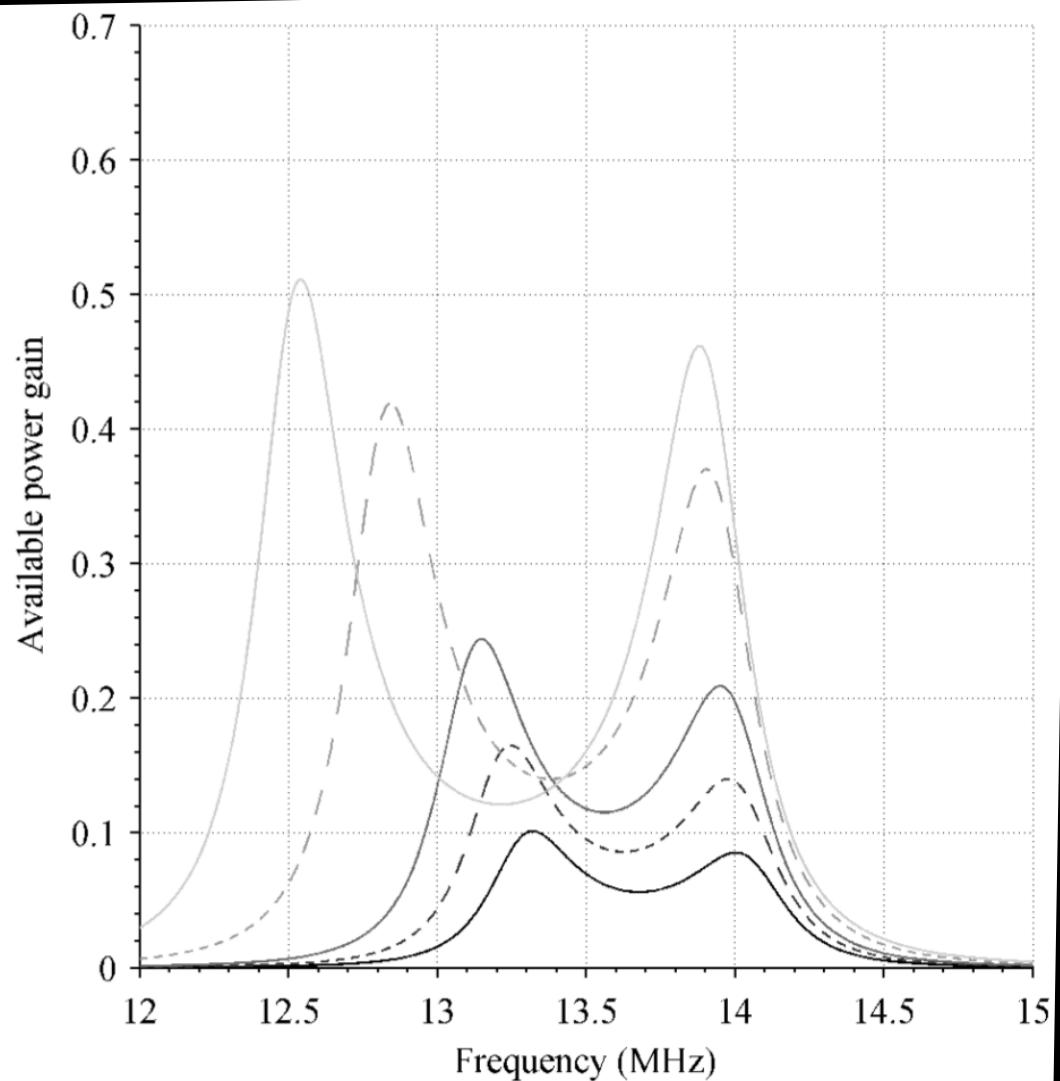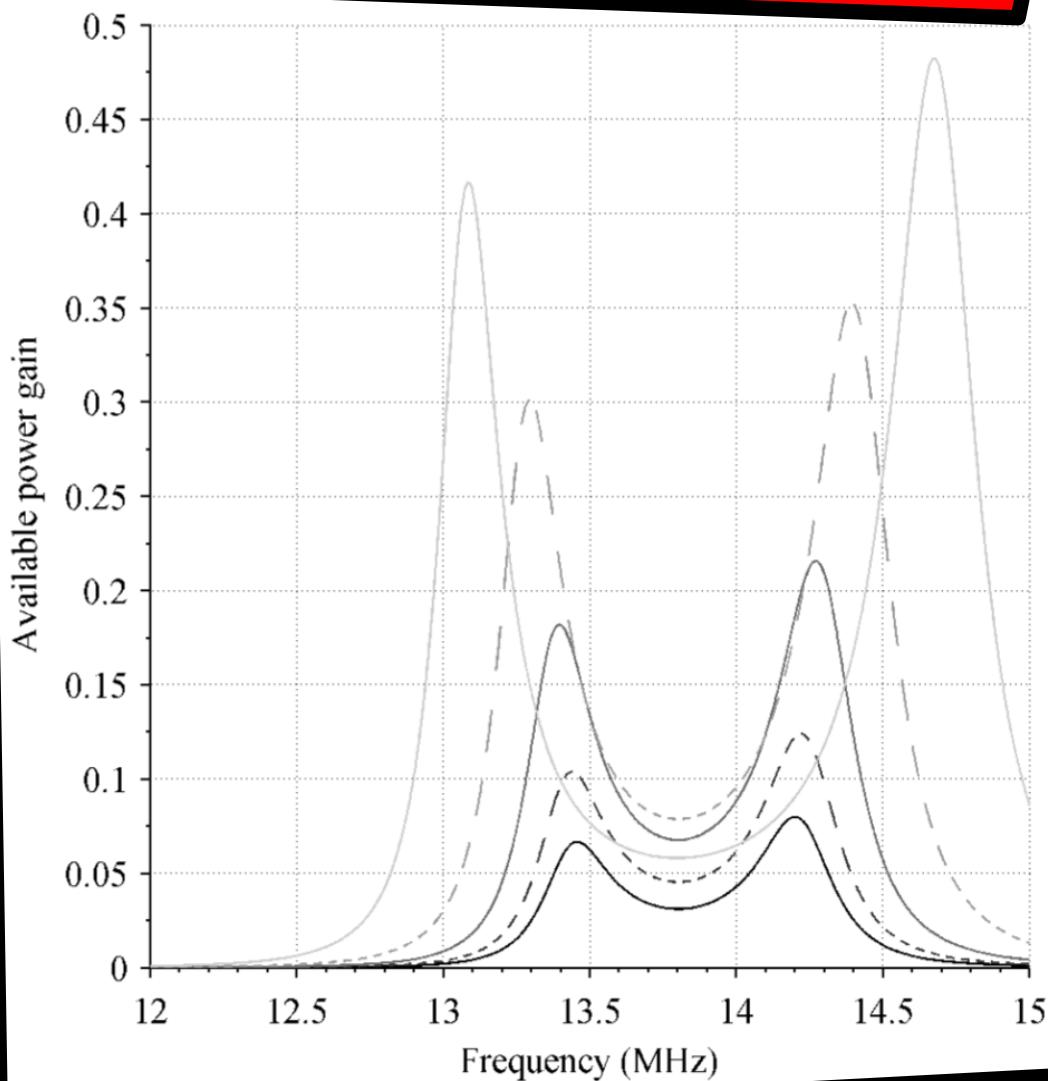

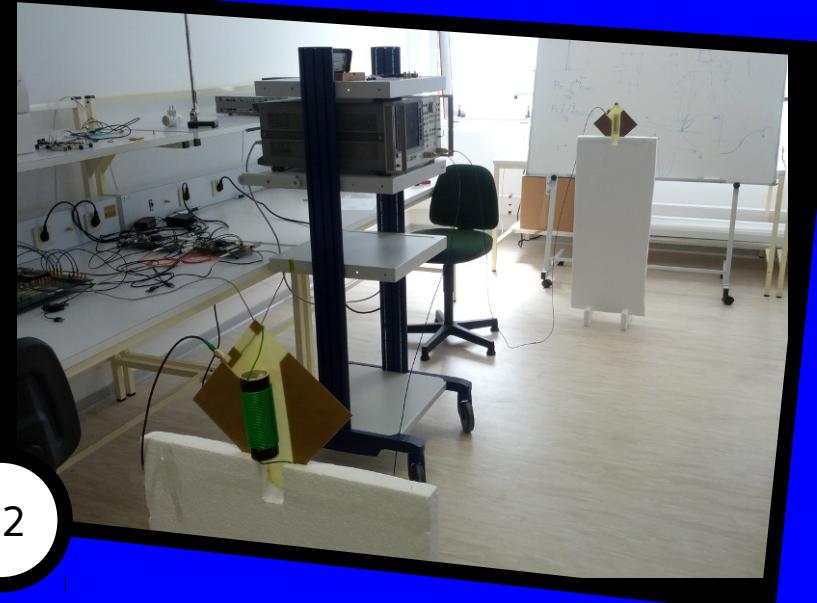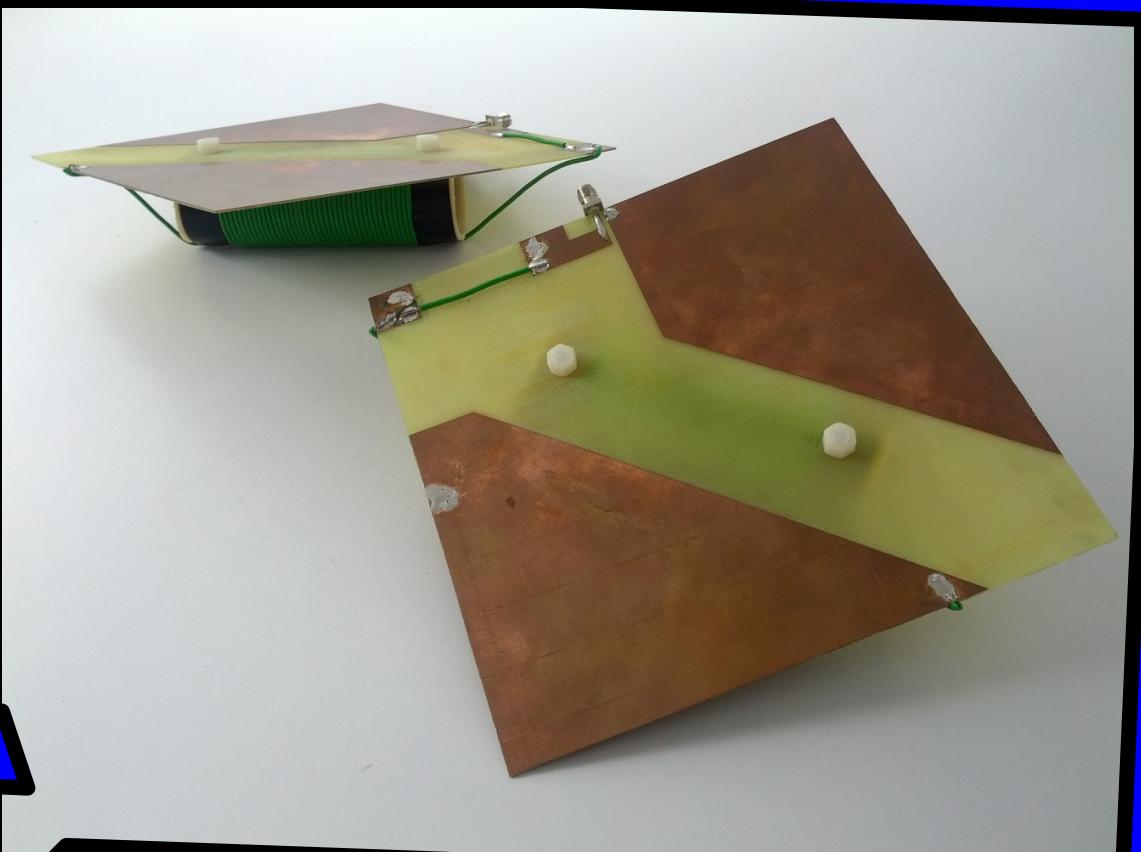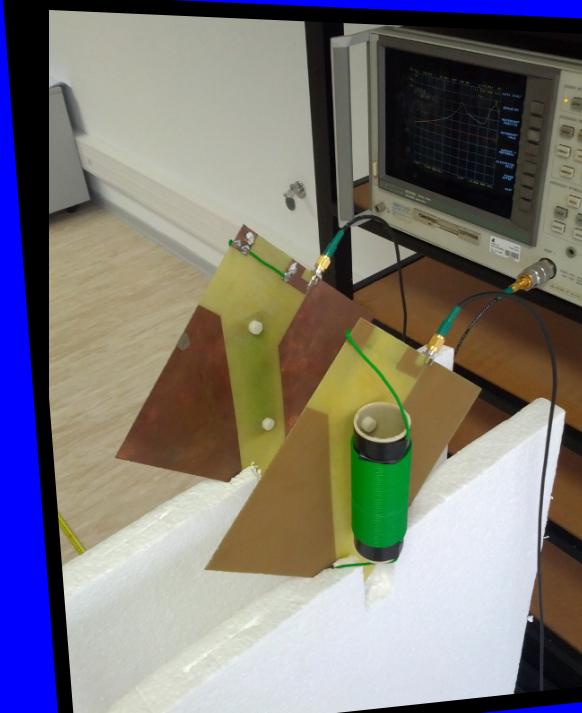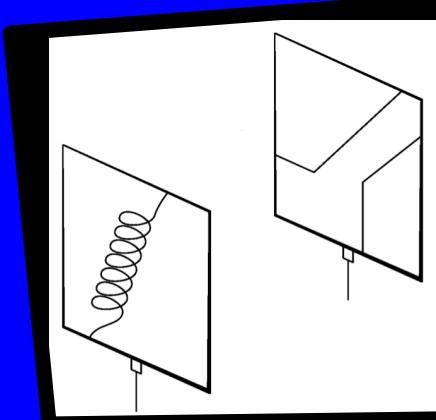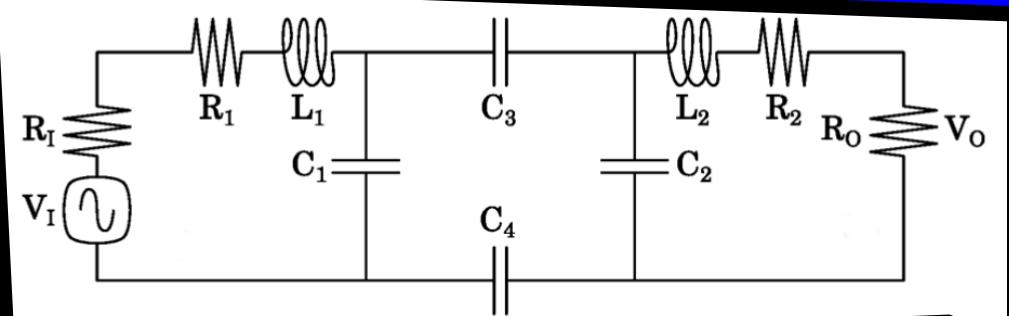

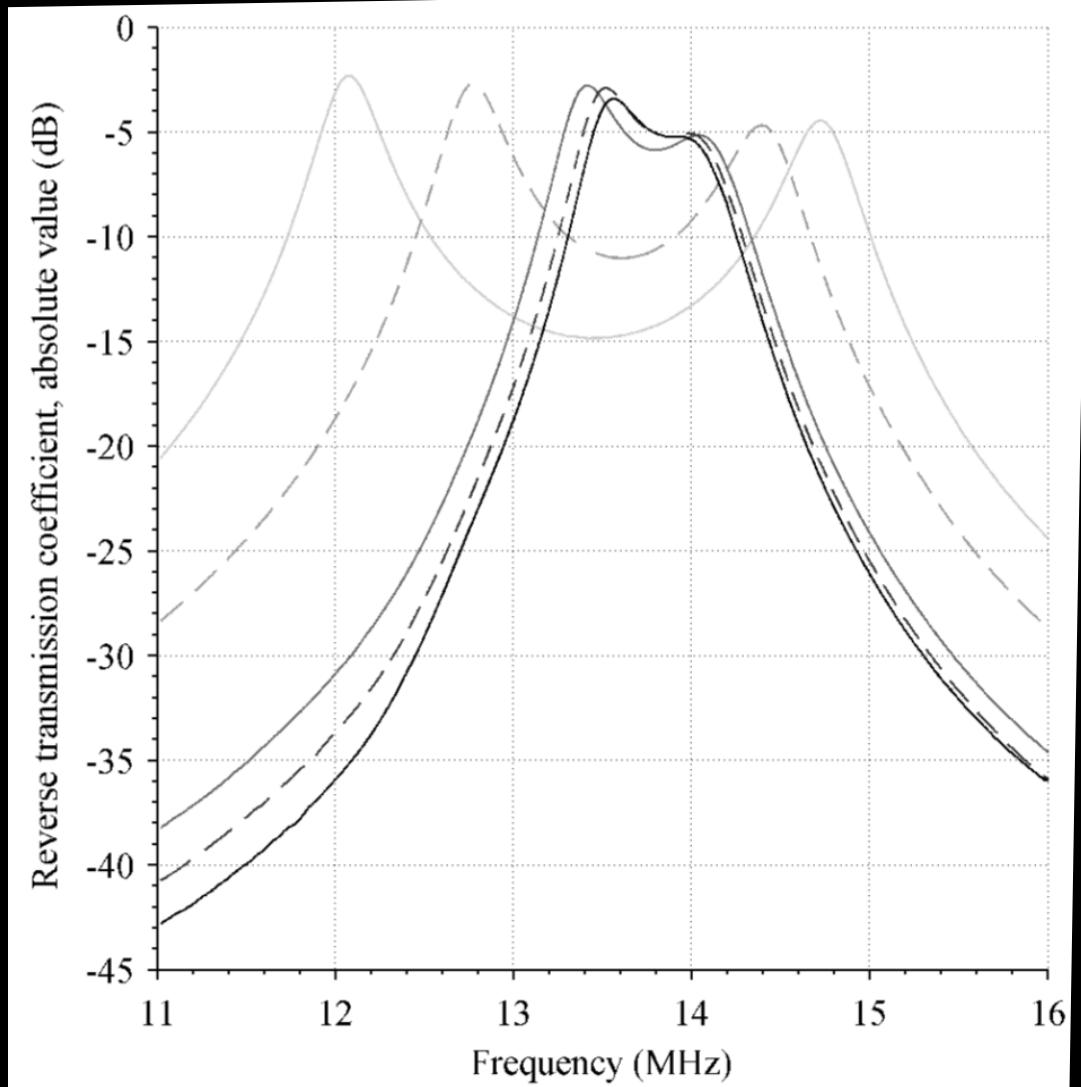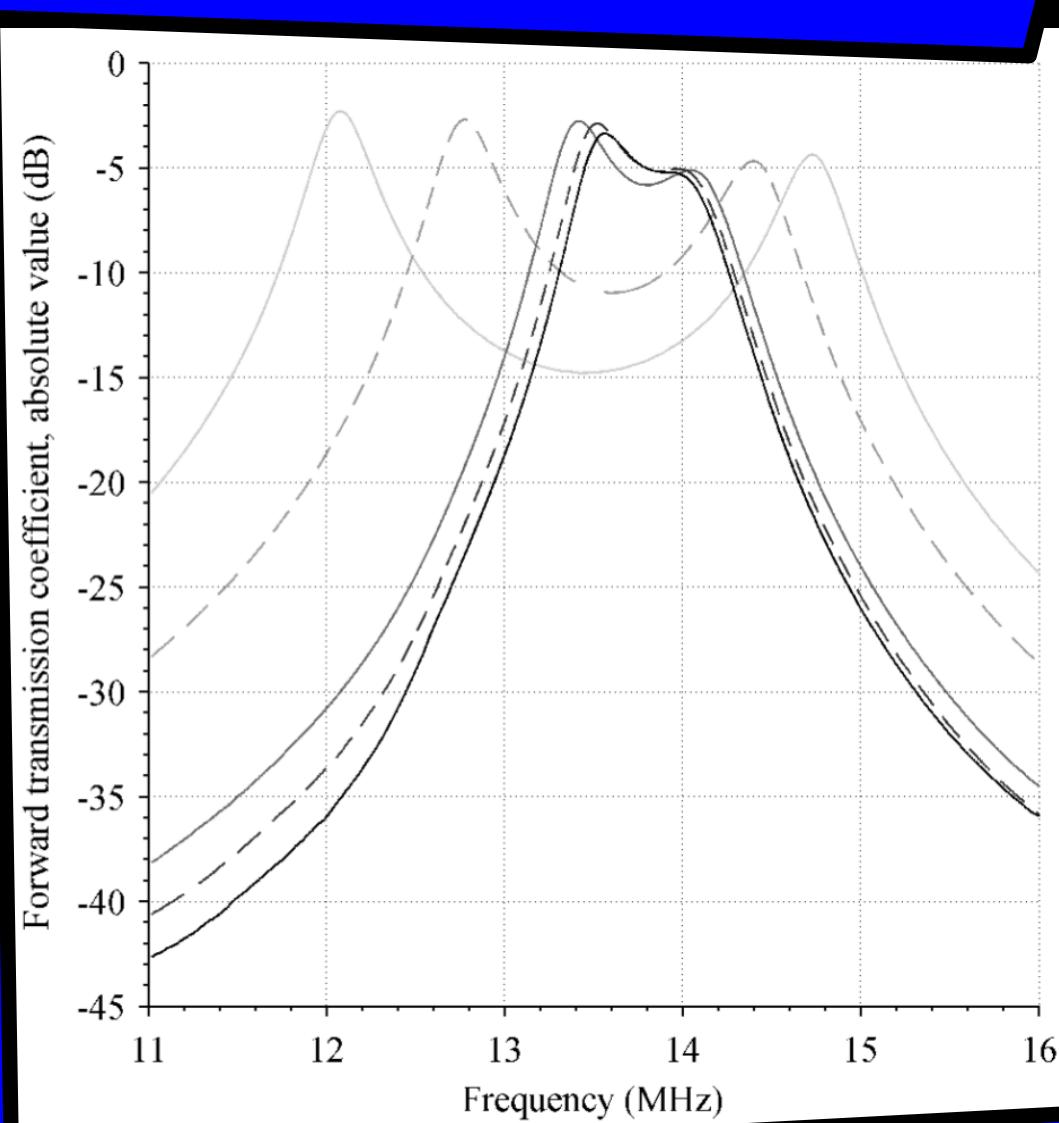

distance (cm)



10

20


60

90


500

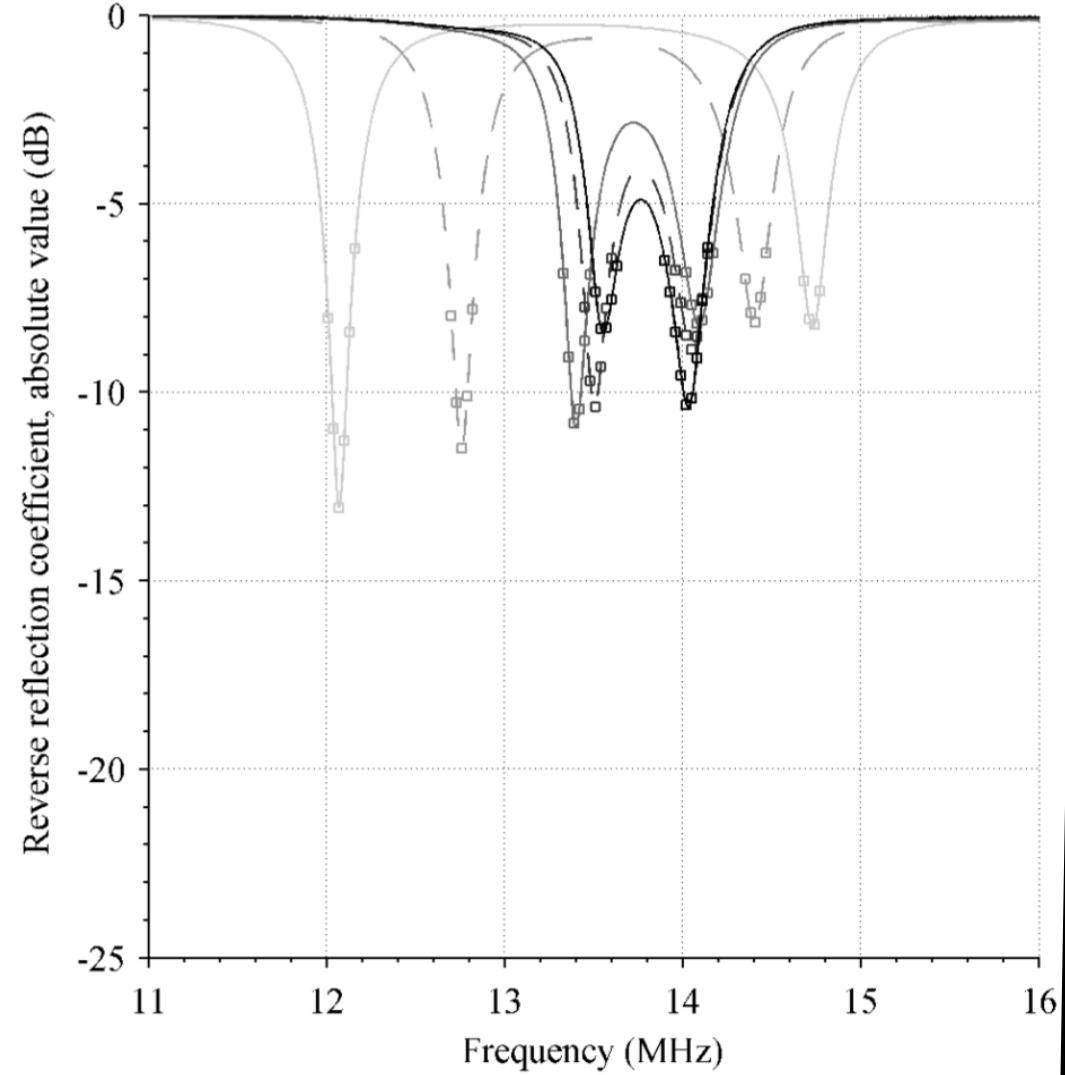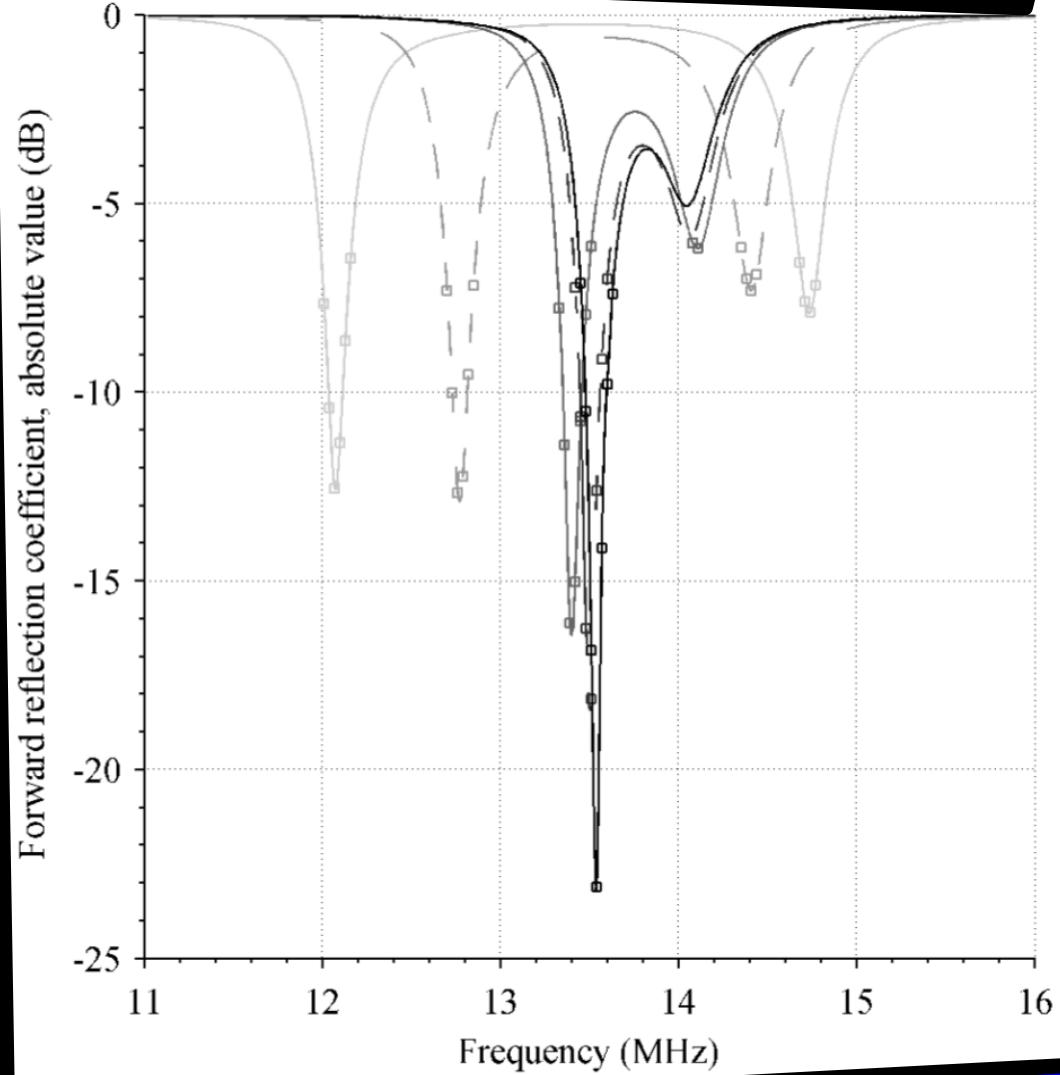

angle (°) 0 40 90 180 270

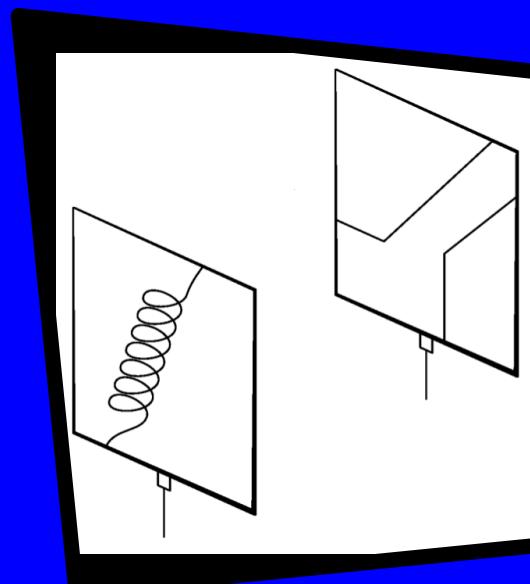

distance (cm) 500

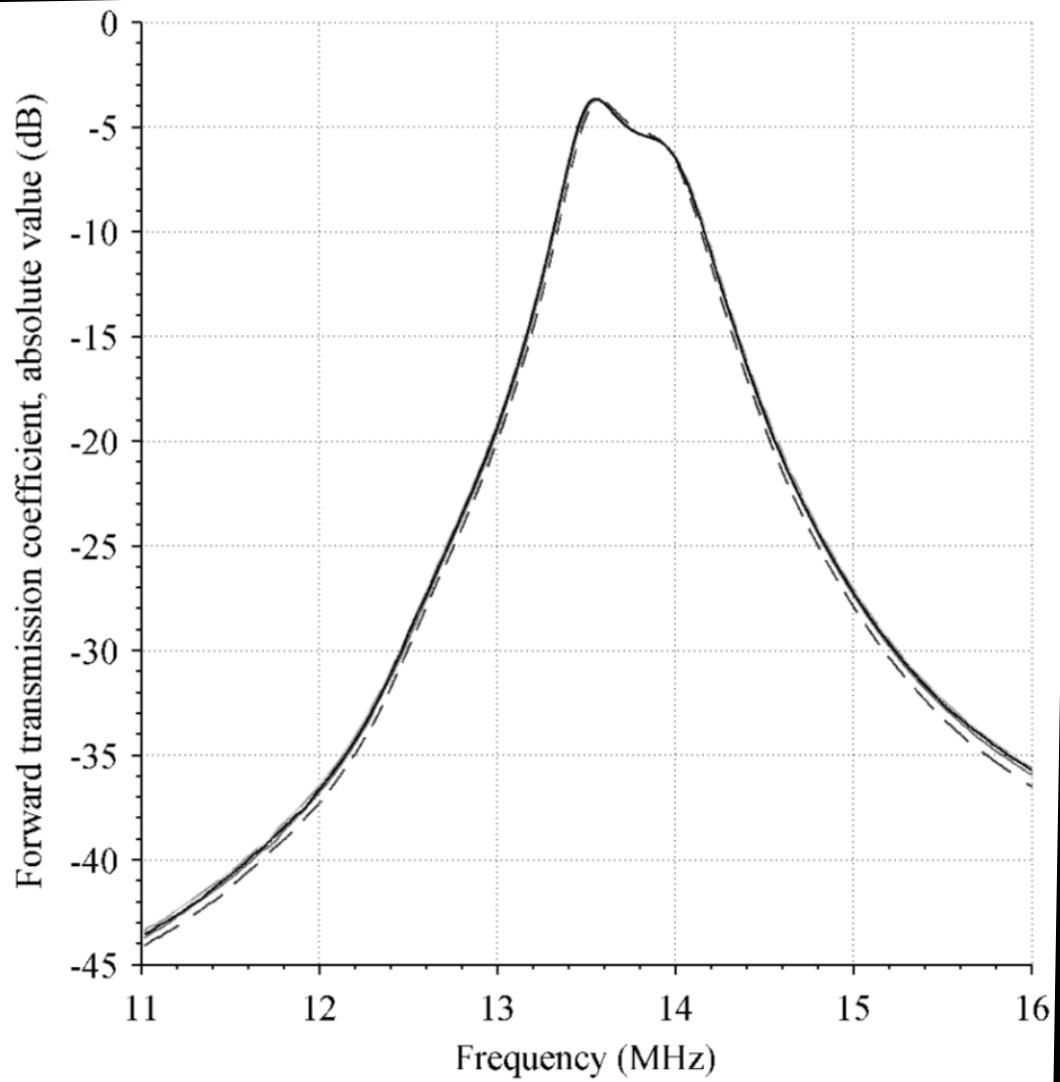

Conclusions:

Systems based on resonant magnetic coupling are currently very popular in the literature, systems based on resonant electrical coupling are not;
The duality between resonant magnetic coupling and resonant electrical coupling is quite noticeable;
It was not yet possible to obtain a complete match between experimental results and theory, but some key aspects were confirmed.

Acknowledgments:

Fundação para a Ciência e a Tecnologia (grant SFRH/BD/69392/2010)
Project EXCL/EEI-TEL/0067/2012 – CREATION
COST IC 1301 – WIPE



Fundação para a Ciência e a Tecnologia
MINISTÉRIO DA EDUCAÇÃO E CIÊNCIA



CREATION
QUESTION



EUROPEAN COOPERATION IN SCIENCE AND TECHNOLOGY



Thank you for your
attention