

R&S® ZVAX24 Extension Unit Specifications



CONTENTS

Definitions	3
Specifications.....	4
Measurement range.....	4
Through path transmission loss	4
<i>Options</i>	4
Connectors.....	7
<i>Front panel connectors</i>	7
<i>Rear panel connectors</i>	8
General data	9
Ordering information	10

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

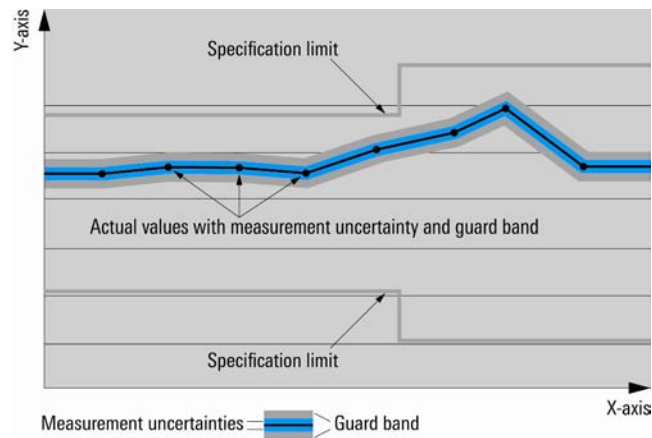

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Specifications

Measurement range

Frequency range	10 MHz to 24 GHz (unless other specification of an option)
Dynamic range from PORT 1 to PORT 2	typ. > 120 dB (with R&S®ZVAX-B291 and R&S®ZVAX-B292 options not installed)

Through path transmission loss

Without switchable option looped into the signal path.

PORT 1 SOURCE IN to PORT 1 SOURCE OUT (with R&S®ZVAX-B291 option not installed)	10 MHz to 8 GHz	< 4 dB
	8 GHz to 24 GHz	< 7 dB
PORT 1 SOURCE IN to PORT 1 (with R&S®ZVAX-B291 option installed)	10 MHz to 8 GHz	< 6 dB
	8 GHz to 24 GHz	< 10 dB
PORT 3 SOURCE IN to PORT 3 SOURCE OUT	10 MHz to 8 GHz	< 5 dB
	8 GHz to 24 GHz	< 8 dB
PORT 2 MEAS IN to PORT 2 MEAS OUT (with R&S®ZVAX-B292 option not installed)	10 MHz to 2 GHz	< 4 dB
	2 GHz to 24 GHz	< 7 dB
PORT 2 to PORT 2 MEAS OUT (with R&S®ZVAX-B292 option installed)	500 MHz to 8 GHz	< 16 dB
	8 GHz to 24 GHz	< 19 dB

Options

Data for an option is valid for a RF path switch setting that loops only the respective option into the signal path(s).

R&S®ZVAX-B210 port 2 receiver monitor output	allows monitoring of the signal in the measurement receiver path of test port 2	
Transmission loss		
With R&S®ZVAX-B292 option not installed	PORT 2 MEAS IN to PORT 2 MONITOR	
	500 MHz to 8 GHz	11 dB ± 5 dB
	8 GHz to 23 GHz	15 dB ± 5 dB
With R&S®ZVAX-B292 option installed	PORT 2 to PORT 2 MONITOR	
	700 MHz to 8 GHz	21 dB ± 5 dB
	8 GHz to 23 GHz	24 dB ± 5 dB
	23 GHz to 24 GHz	26 dB ± 5 dB

R&S®ZVAX-B211 combiner	generates a two tone-signal by combining the sources of test ports 1 and 3 e.g. for intermodulation measurements	
Transmission loss		
With R&S®ZVAX-B291 option not installed	PORT 1 or 3 SOURCE IN to PORT 1 SOURCE OUT	
	10 MHz to 8 GHz	< 9 dB
With R&S®ZVAX-B291 option installed	PORT 1 or 3 SOURCE IN to PORT 1	
	10 MHz to 8 GHz	< 10 dB
	8 GHz to 24 GHz	< 16 dB
Isolation	PORT 1 SOURCE IN to PORT 3 SOURCE IN	
	500 MHz to 24 GHz	> 19 dB
Match	PORT 3 SOURCE OUT	
	10 MHz to 8 GHz	< 16 dB
	8 GHz to 24 GHz	< 13 dB

R&S® ZVAX-B251 harmonic filter generator port 1	reduces the harmonic distortion of the source signal of test port 1	
Transmission loss		
With R&S® ZVAX-B291 option not installed	PORT 1 SOURCE IN to PORT 1 SOURCE OUT	
	1 GHz to 8 GHz	< 11 dB
	8 GHz to 20 GHz	< 16 dB
	20 GHz to 23 GHz	< 19 dB
With R&S® ZVAX-B291 option installed	PORT 1 SOURCE IN to PORT 1	
	1 GHz to 8 GHz	< 12 dB
	8 GHz to 20 GHz	< 17 dB
	20 GHz to 23 GHz	< 20 dB
Harmonic suppression	PORT 1 SOURCE IN to PORT 1 (SOURCE OUT)	
	1 GHz to 8 GHz	> 45 dB
	8 GHz to 12 GHz	> 35 dB
Harmonics of source signal ¹	PORT 1 (of the R&S® ZVAX24 or the R&S® ZVA24)	typ. < -60 dBc at maximum power

R&S® ZVAX-B253 harmonic filter generator port 3	reduces the harmonic distortion of the source signal of test port 3	
Transmission loss		
	PORT 3 SOURCE IN to PORT 3 SOURCE OUT	
	1 GHz to 8 GHz	< 11 dB
	8 GHz to 20 GHz	< 16 dB
	20 GHz to 23 GHz	< 19 dB
Harmonic suppression	PORT 3 SOURCE IN to PORT 3 SOURCE OUT	
	1 GHz to 8 GHz	> 45 dB
	8 GHz to 12 GHz	> 35 dB
Harmonics of source signal ¹	PORT 3 (of the R&S® ZVAX24 or the R&S® ZVA24)	typ. < -60 dBc at maximum power

R&S® ZVAX-B252 harmonic filter receiver port 2	suppresses the fundamental entering the measurement receiver of port 2 and thus avoids receiver-generated harmonics that could distort harmonic measurements	
Transmission loss		
With R&S® ZVAX-B292 option not installed	PORT 2 MEAS IN to PORT 2 MEAS OUT	
	1 GHz to 8 GHz	< 11 dB
	8 GHz to 20 GHz	< 16 dB
	20 GHz to 23 GHz	< 19 dB
With R&S® ZVAX-B292 option installed	PORT 2 to PORT 2 MEAS OUT	
	1 GHz to 8 GHz	< 22 dB
	8 GHz to 20 GHz	< 27 dB
	20 GHz to 23 GHz	< 30 dB
Fundamental suppression	PORT 2 (MEAS IN) to PORT 2 MEAS OUT	
	1 GHz to 4 GHz	> 30 dB
	4 GHz to 12 GHz	> 40 dB

R&S® ZVAX-B271 pulse modulator generator port 1	allows pulse modulation of the source signal of port 1	
Transmission loss with modulator ON		
With R&S® ZVAX-B291 option not installed	PORT 1 SOURCE IN to PORT 1 SOURCE OUT	
	10 MHz to 8 GHz	< 9 dB
	8 GHz to 20 GHz	< 14 dB
	20 GHz to 24 GHz	< 17 dB
With R&S® ZVAX-B291 option installed	PORT 1 SOURCE IN to PORT 1	
	10 MHz to 8 GHz	< 11 dB
	8 GHz to 20 GHz	< 16 dB
	20 GHz to 24 GHz	< 19 dB
Transmission loss with modulator OFF	PORT 1 SOURCE IN to PORT 1 (SOURCE OUT)	
	10 MHz to 24 GHz	typ. > 70 dB
Pulse rise and fall time (10 % ↔ 90 % RF power)	10 MHz to 24 GHz	typ. < 10 ns

¹ When the R&S® ZVAX24 operates with the R&S® ZVA24.

R&S® ZVAX-B273 pulse modulator generator port 3	allows pulse modulation of the source signal of port 3	
Transmission loss with modulator ON	PORT 3 SOURCE IN to PORT 3 SOURCE OUT	
	10 MHz to 8 GHz	< 9 dB
	8 GHz to 20 GHz	< 14 dB
	20 GHz to 24 GHz	< 17 dB
Transmission loss with modulator OFF	PORT 3 SOURCE IN to PORT 3 SOURCE OUT	
	10 MHz to 24 GHz	typ. > 70 dB
Pulse rise and fall time (10 % ↔ 90 % RF power)	10 MHz to 24 GHz	typ. < 10 ns

R&S® ZVAX-B272 pulse modulator receiver port 2	allows pulse modulation of the measurement receiver signal of port 2	
Transmission loss with modulator ON		
With R&S® ZVAX-B292 option not installed	PORT 2 MEAS IN to PORT 2 MEAS OUT	
	10 MHz to 8 GHz	< 9 dB
	8 GHz to 24 GHz	< 14 dB
With R&S® ZVAX-B292 option installed	PORT 2 to PORT 2 MEAS OUT	
	500 MHz to 8 GHz	< 20 dB
	8 GHz to 24 GHz	< 27 dB
Transmission loss with modulator OFF	PORT 2 (MEAS IN) to PORT 2 MEAS OUT	
	10 MHz to 24 GHz	typ. > 70 dB
Pulse rise and fall time (10 % ↔ 90 % RF power)	10 MHz to 24 GHz	typ. < 10 ns

R&S® ZVAX-B291 high power coupler port 1	allows testing of high-power devices	
Maximum power at PORT 1 ²	10 MHz to 24 GHz	43 dBm
Reference channel coupling loss PORT 1 SOURCE IN to PORT 1 REF OUT	500 MHz to 8 GHz	22 dB ± 5 dB
	8 GHz to 24 GHz	25 dB ± 5 dB
Reference channel isolation PORT 1 to PORT 1 REF OUT	10 MHz to 24 GHz	> 28 dB
Measurement channel coupling loss PORT 1 to PORT 1 MEAS OUT	500 MHz to 24 GHz	10 dB ± 5 dB
Measurement channel isolation PORT 1 SOURCE IN to PORT 1 MEAS OUT	10 MHz to 20 GHz	> 25 dB
	20 GHz to 24 GHz	> 23 dB

R&S® ZVAX-B292 high power coupler port 2	allows testing of high-power devices	
Maximum power at PORT 2 ²	10 MHz to 24 GHz	43 dBm
Transmission loss PORT 2 SOURCE IN to PORT 2	10 MHz to 8 GHz	< 3 dB
	8 GHz to 20 GHz	< 4 dB
	20 GHz to 24 GHz	< 5 dB
Reference channel coupling loss PORT 2 SOURCE IN to PORT 2 REF OUT	500 MHz to 8 GHz	20 dB ± 5 dB
	8 GHz to 24 GHz	22 dB ± 5 dB
Reference channel isolation PORT 2 to PORT 2 REF OUT	10 MHz to 24 GHz	> 28 dB
Measurement channel isolation PORT 2 SOURCE IN to PORT 2 MEAS OUT	10 MHz to 20 GHz	> 25 dB
	20 GHz to 24 GHz	> 23 dB

² External attenuators and/or isolators may be necessary to prevent the R&S® ZVAX24 or the R&S® ZVA24 from being damaged.

Connectors

General data for RF inputs and outputs (unless otherwise specified)

Connector type	2.92 mm female
Impedance	50 Ω
Maximum nominal input power	20 dBm
Damage power	27 dBm
Damage DC voltage	± 1 V

Front panel connectors

PORT 3 SOURCE IN (only with R&S [®] ZVAX-B211, -B253 or -B273 options)	input for the source signal of port 3
PORT 3 SOURCE OUT (only with R&S [®] ZVAX-B211, -B253 or -B273 options)	output for the source signal of port 3
PORT 1 SOURCE IN (only with R&S [®] ZVAX-B211, -B251, -B271 or -B291 options)	input for the source signal of port 1
PORT 1 SOURCE OUT (only with R&S [®] ZVAX-B211, -B251 or -B271 options, but not if -B291 is installed)	output for the source signal of port 1
PORT 1 REF OUT (only with R&S [®] ZVAX-B291 option)	output for the reference receiver signal of port 1
PORT 1 MEAS OUT (only with R&S [®] ZVAX-B291 option)	output for the measurement receiver signal of port 1
PORT 1 (only with R&S [®] ZVAX-B291 option)	test port 1
Connector type	3.5 mm male
Impedance	50 Ω
Maximum nominal input power	43 dBm
Damage power	45 dBm
PORT 2 SOURCE IN (only with R&S [®] ZVAX-B292 option)	input for the source signal of port 2
Maximum nominal input power	43 dBm
Damage power	45 dBm
PORT 2 REF OUT (only with R&S [®] ZVAX-B292 option)	output for the reference receiver signal of port 2
PORT 2 MEAS IN (only with R&S [®] ZVAX-B252 or -B272 options, but not if -B292 is installed)	input for the measurement receiver signal of port 2
PORT 2 MEAS OUT (only with R&S [®] ZVAX-B252, -B272 or -B292 options)	output for the measurement receiver signal of port 2
PORT 2 (only with R&S [®] ZVAX-B292 option)	test port 2
Connector type	3.5 mm male
Impedance	50 Ω
Maximum nominal input power	43 dBm
Damage power	45 dBm
PORT 2 MONITOR (only with R&S [®] ZVAX-B210 option)	monitor output for the measurement receiver signal of port 2
USB	(two) universal serial bus connectors type A for USB devices (USB 2.0)

Rear panel connectors

PORT 1 SOURCE IN, OUT (only with R&S®ZVAX-B211, -B251 or -B271 option)	input and output that can be used to loop external components into port 1 source signal path	
PORT 2 SOURCE IN, OUT (only with R&S®ZVAX-B292 option)	input and output that can be used to loop external components into port 2 source signal path	
PORT 3 SOURCE IN, OUT (only with R&S®ZVAX-B211, -B253 or -B273 option)	input and output that can be used to loop external components into port 3 source signal path	
Maximum nominal input power ³		
With R&S®ZVAX-B211 option not installed	43 dBm	
With R&S®ZVAX-B211 option installed	37 dBm	
Damage power ³		
With R&S®ZVAX-B211 option not installed	45 dBm	
With R&S®ZVAX-B211 option installed	40 dBm	
USB FROM NWA	universal serial bus connector type B for connection to the R&S®ZVA (USB 2.0)	
USB	(two) universal serial bus connectors type A for USB devices (USB 2.0)	
FILTER CONTROL IN	25-pin D-Sub connector, reserved for future use	
CASCADE IN	input for pulse and sync LVDS signals from R&S®ZVA pulse generator, for connection to the R&S®ZVA CASCADE jack, connector type 8P8C western modular jack	
Not connected	pin 1 to 3, 6	–
Pulse_B and pulse_A	pin 4 and 5 (input)	pulse signal from R&S®ZVA
Sync_B and sync_A	pin 7 and 8 (input)	sync signal from R&S®ZVA
GND	pin 9 and 10	signal ground
EXT PULSE GENERATOR IN 1, 2	inputs for pulse signals from external pulse generator	
Connector type		BNC, female
TTL signal		5 V
Polarity		positive
Input impedance		> 10 kΩ
PULSE GENERATOR OUT 1, 2	outputs for pulse signals	
Connector type		BNC, female
TTL signal		5 V
Polarity		positive

³ At PORT 1 SOURCE IN and PORT 3 SOURCE IN.

General data

Temperature loading	in line with IEC 60068-2-1 and IEC 60068-2-2	
	operating temperature range	+5 °C to +40 °C
	permissible temperature range	+5 °C to +40 °C
	storage temperature range	-40 °C to +70 °C
Damp heat		+40 °C at 95 % rel. humidity, in line with IEC 60068-2-30
Mechanical resistance	vibration, sinusoidal	5 Hz to 150 Hz, in line with IEC 60068-2-6
	vibration, random	10 Hz to 300 Hz, in line with IEC 60068-2-64
	shock	40 g shock spectrum, in line with IEC 60068-2-27, MIL-STD-810
Calibration interval		1 year
EMC, RF emission	in line with EN 61000-6-4, operation is not covered in residential, commercial, and business areas nor in small-size companies. Thus, the instrument must not be operated in residential, commercial, and business areas nor in small-size companies unless additional measures are taken to ensure that EN 61000-6-3 is met.	in line with CISPR 11/EN 55011 group 1 class A (for a shielded test setup) The instrument complies with the emission requirements stipulated by EN 55011 class A. This means that the instrument is suitable for use in industrial environments.
EMC, other emissions and immunity		in line with IEC/EN 61326, emission class B (residential environment), immunity industrial environment (excluding operating frequency)
Safety		IEC 61010-1, EN 61010-1, UL 61010-1 (2nd Edition.), CSA C22.2 No. 61010-1-04
Power supply		100 V to 240 V AC with tolerance $\pm 10\%$, 50 Hz to 60 Hz with tolerance $\pm 5\%$
Power consumption		0.5 A to 0.2 A (20 W typ.)
Test mark		VDE, GS, CSA, CSA-NRTL/C, CE conformity mark
Dimensions (W x H x D)		465 mm x 109 mm x 495 mm (18.31 in x 4.29 in x 19.49 in)
Weight		9 kg (20 lb)
Shipping weight		16 kg (35 lb)

Ordering information

Designation	Type	Order No.
Extension Unit	R&S®ZVAX24	1311.2509.02
Options		
Port 2 Receiver Monitor Output	R&S®ZVAX-B210	1311.2521.02
Combiner	R&S®ZVAX-B211	1311.2538.02
Harmonic Filter Source Port 1	R&S®ZVAX-B251	1311.2544.02
Harmonic Filter Receiver Port 2	R&S®ZVAX-B252	1311.2550.02
Harmonic Filter Source Port 3	R&S®ZVAX-B253	1311.2567.02
Pulse Modulator Source Port 1	R&S®ZVAX-B271	1311.2573.02
Pulse Modulator Receiver Port 2	R&S®ZVAX-B272	1311.2580.02
Pulse Modulator Source Port 3	R&S®ZVAX-B273	1311.2596.02
High Power Coupler Port 1	R&S®ZVAX-B291	1311.2609.02
High Power Coupler Port 2	R&S®ZVAX-B292	1311.2615.02

Service options		
Two-Year Calibration Service	R&S®CO2ZVAX24	Please contact your local Rohde & Schwarz sales office.
Three-Year Calibration Service	R&S®CO3ZVAX24	
Five-Year Calibration Service	R&S®CO5ZVAX24	
One-Year Repair Service following the warranty period	R&S®RO2ZVAX24	
Two-Year Repair Service following the warranty period	R&S®RO3ZVAX24	
Four-Year Repair Service following the warranty period	R&S®RO5ZVAX24	

Service you can rely on

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

Environmental commitment

- | Energy-efficient products
- | Continuous improvement in environmental sustainability
- | ISO 14001-certified environmental management system

Certified Quality System
ISO 9001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East
+49 89 4129 123 45
customersupport@rohde-schwarz.com
- | North America
1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America
+1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia/Pacific
+65 65 13 04 88
customersupport.asia@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners | Printed in Germany (as)
PD 5214.2291.22 | Version 02.00 | February 2011 | R&S®ZVAX24
Subject to change

© 2009 - 2011 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany



5214229122