

Getting Started


1 Insert CD, then choose **Install Software.**

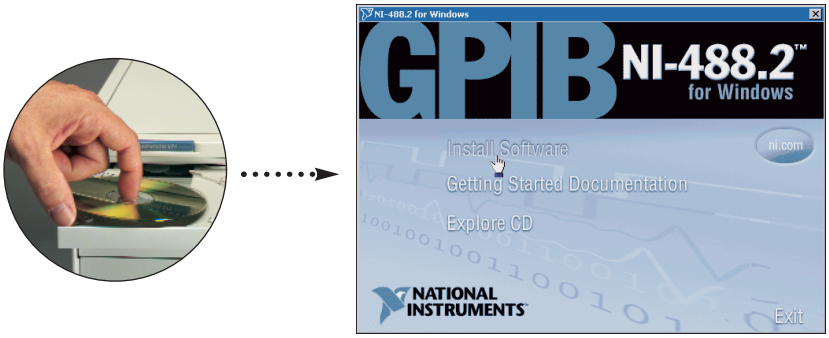

2 Select **Plug and Play Interface** and click **Next**.

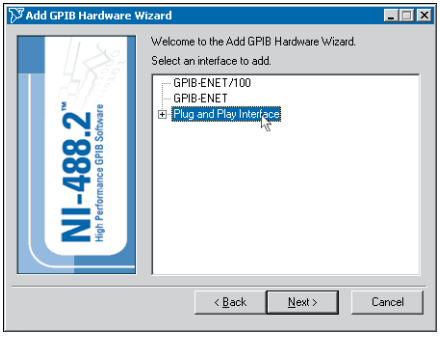

3 Select **Shutdown** and click **Finish**, then power off computer.

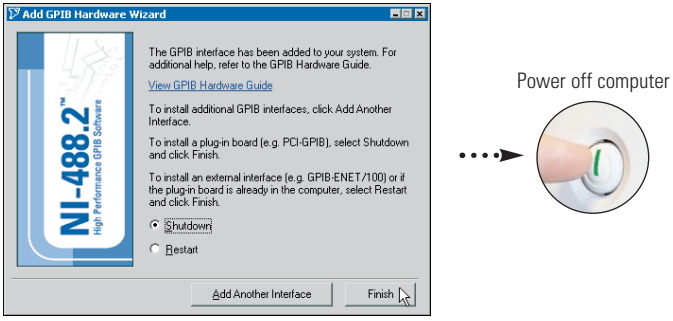


Power off computer

Continue to step 4 ▸

4 Install hardware [1].

A. Select an unused PMC slot. You may need to remove the host to access a PMC slot.

B. Insert the PMC-GPIB and screw it into place.

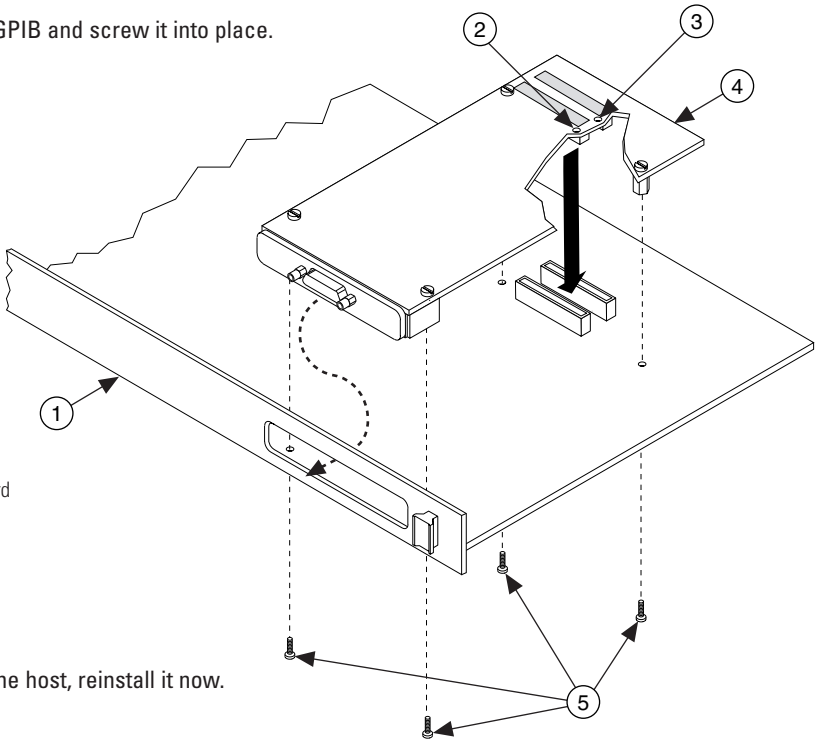

Key

1 Host Face Plate Board
2 3.3 V Keying Hole
3 5 V Keying Hole
4 PMC-GPIB Board
5 Mounting Screws

C. If you removed the host, reinstall it now.

5 Power on computer, then run NI-488.2 Getting Started Wizard.

Power on computer





[1] For help installing your hardware, refer to the *GPIB Hardware Guide* (available on the CD through **Getting Started Documentation**).

© 1999–2003 National Instruments Corporation. All rights reserved.

National Instruments™, NI-488.2™, and ni.com™ are trademarks of National Instruments Corporation.
Product and company names mentioned herein are trademarks or trade names of their respective companies.

For patents covering National Instruments products, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your CD, or `ni.com/patents`.

322268B-01 Feb03