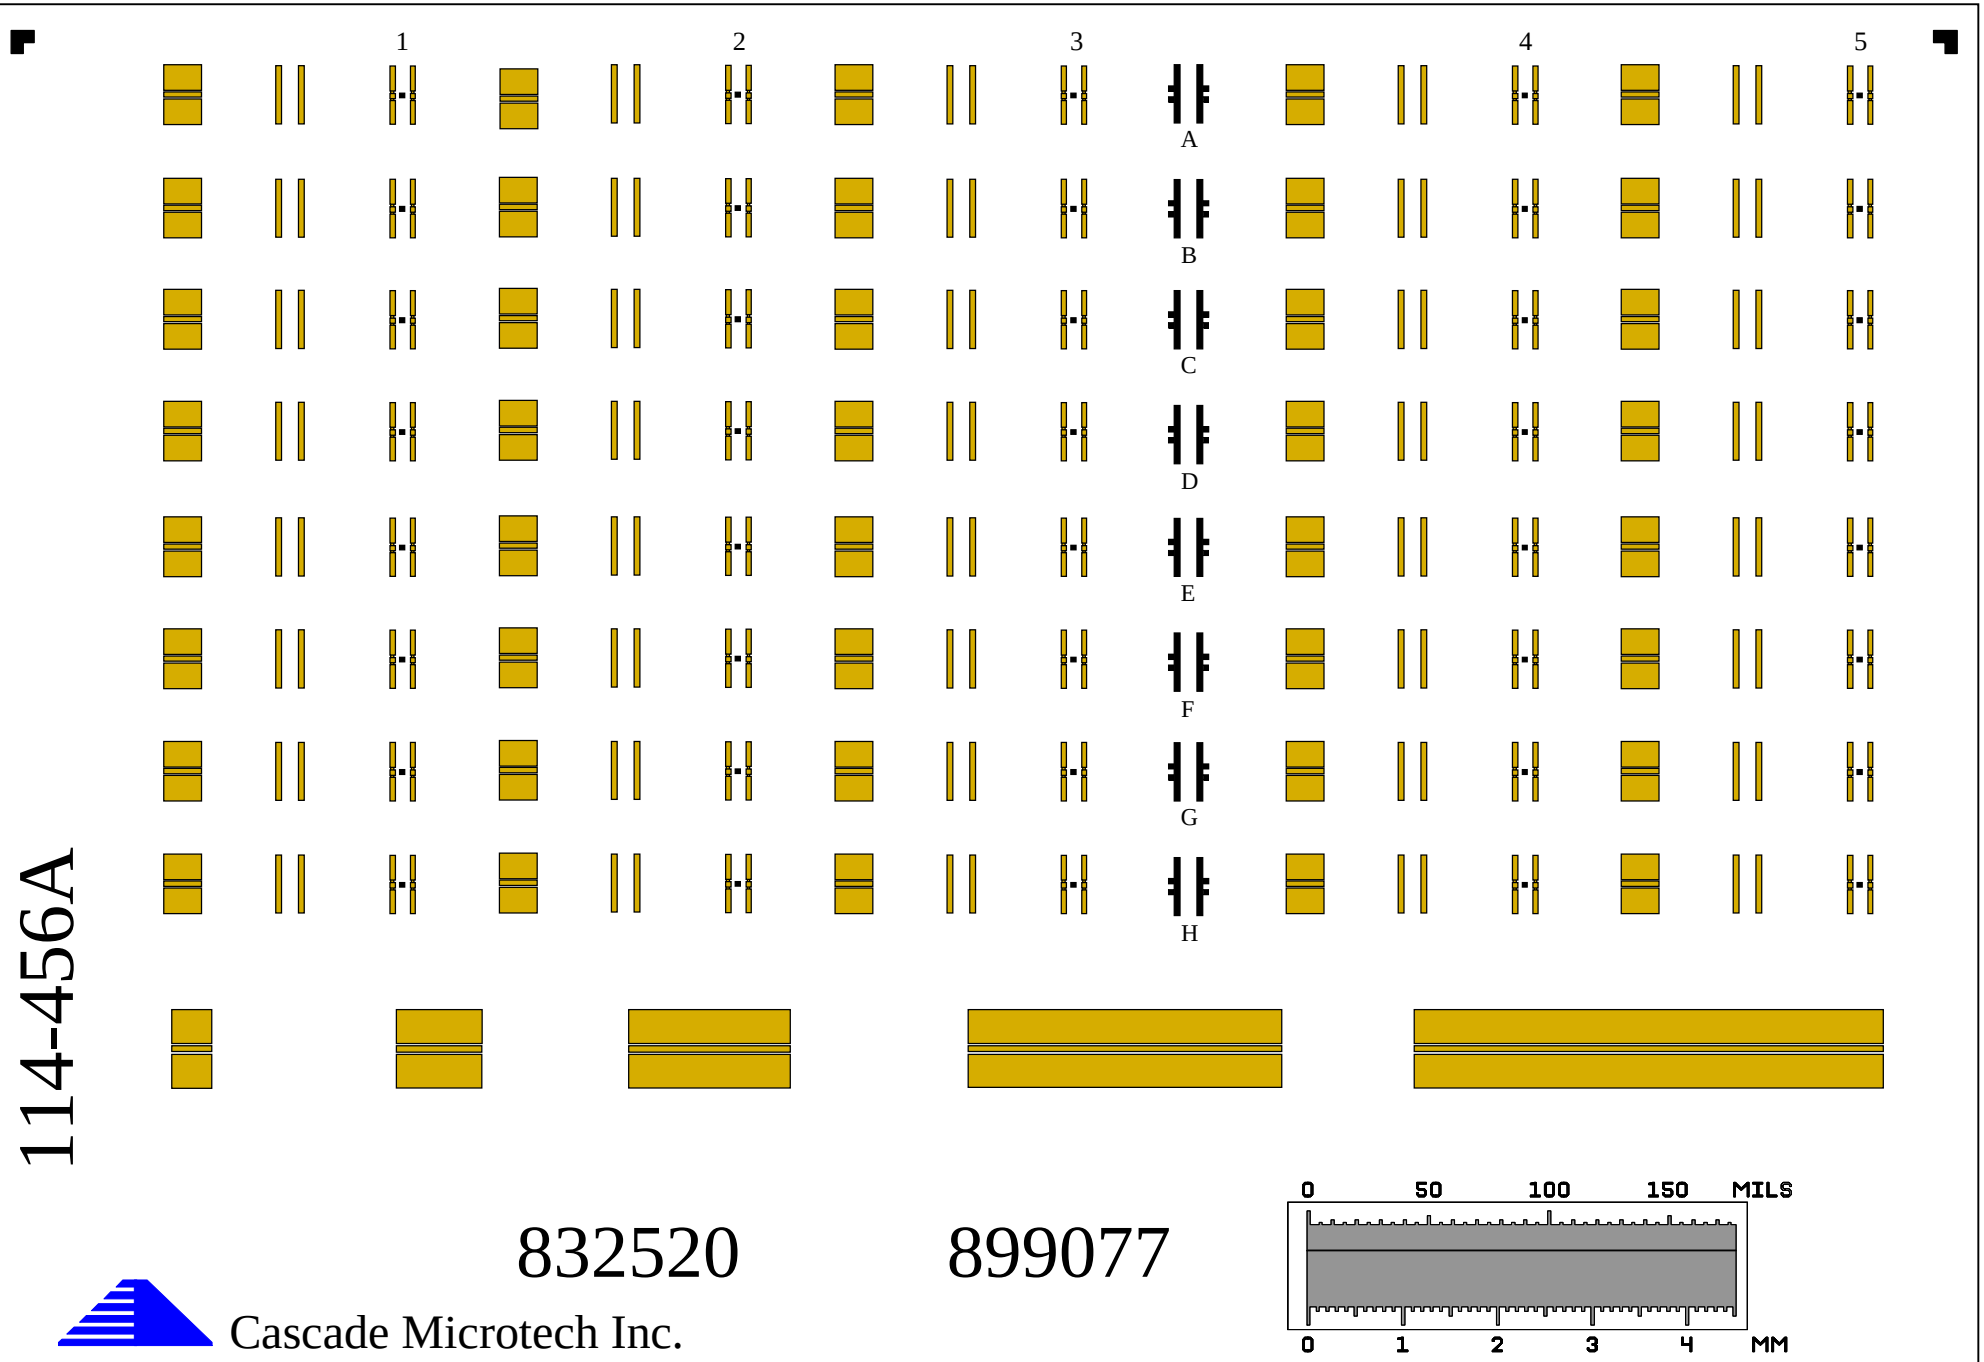
HPC Impedance Standard Substrate

(**Pitch:** 100 µm – 150 µm, **Configuration:** Ground-Signal-Ground)

P/N: 114-456 ; **S/N:**











832520 899077

Cascade Microtech Inc.

Key to Map

Substrate specifications: Material: Alumina; Thickness: 625 µm ± 25 µm; Dielectric constant: 9.9

 **Thru**  **Short**	**Thru delay:** 2 ps **Impedance:** Nominally 50 Ω **Dimensions:** Length: 325 µm **Dimensions:** 50 X 350 µm Bars	 **Load**  **Precision 50 Ω Load** **Indicated directly on ISS where Black square is erased**	For optimum calibration accuracy **only** the **Red** -marked load standards should be used **DC accuracy**: +/- 0.3 % **Note:** Ensure the bias supply is turned **off** during calibration. Applying bias to the probe during calibration could cause the resistance of the load to change	**Verification Lines**  **Thru Delay:** ≈ 3 ps  **Thru Delay:** ≈ 7 ps  **Thru Delay:** ≈ 14 ps  **Thru Delay:** ≈ 27 ps  **Thru Delay:** ≈ 40 ps	 ***A-H*** **Alignment Marks** **Note:** An **Open** is synthesized by raising the probes in air a minimum distance of 250 µm above the chuck surface

All of the above specifications are based on an overtravel (downward movement of probe after initial touchdown on the substrate) of 50-75 µm. This amount of overtravel can be set before calibration on the Impedance Standard Substrate (ISS) using the alignment marks (allows precise setting of probe separation and overtravel). Figure 1 shows that initial contact with the edge of the probe tips should be made at reference plane X. The desired overtravel and thus skate (forward movement of probe tips after initial contact with substrate) is then achieved by adjusting the Z height on the positioner to move the edge of the probe tips to reference plane Y. This can also be seen from the photographic images shown in Figure 2.

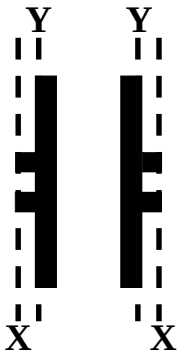



Figure 1: Alignment marks






Figure 2: Images showing correct alignment and placement of probe tips

Calibration Coefficients

The standards used in coaxial calibration are unique devices and since they have a unique connector can have only a single electrical characteristic. In on-wafer probing the electrical behavior of the standards are dependent upon the probe and how it is placed. The shape and configuration of the standard will also be important. Therefore, the calibration coefficients are supplied with the probe not with the ISS.

CASCADE MICROTECH

Cascade Microtech, Inc., 2430 NW 206th Ave, Beaverton OR 97006, USA
Tel: (503) 601-1000; Japan: (03) 5478-6100; Europe: +44 (0) 1295-812828
E-mail: CustomerService@cmicro.com; Japan: Tech_Support_Japan@cmicro.com; Europe: cme-techsupport@cmicro.com