DCQ Quadrant Probe Order Form

❑ New Order

❑ Exact Reorder

Quote Reference #_____

Company _____ Date _____

Shipping Address _____ P.O. # _____

City/State/Zip _____ FAX# _____

Requisitioner _____ Phone _____

Buyer _____ Phone _____

Technical Contact _____ Phone _____

For exact re-orders, no further information is required

DCQ Probe Configurations: 1 to 12 DC needles

Please specify:

Total number of DC needles: (circle one) 1 2 3 4 5 6 7 8 9 10 11 12

Note: 1. All power needles come with a 100 pF capacitor to ground.

2. Probes are designed to be used with a 3 mil overtravel.


3. Indicate ground needles with G

4. Standard pads are 100 mmx100 mm. Indicate any non-standard pads.

Please diagram below the pad layout for DC lines:

Diagram your pad layout here.

Example:

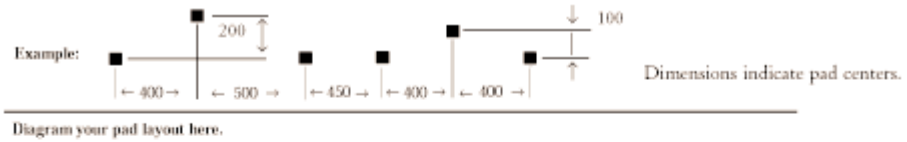

Check box if pad layout drawing or special instructions are attached ☐



Cascade Microtech, Inc., 2430 NW 206th Avenue, Beaverton, Oregon 97006, USA
Tel: (503) 601-1000 Fax: (503) 601-1001 E-mail: sales@cmicro.com
Japan: (03) 5478-6100; Europe: +44 (0) 1295-812828
WWW site: www.cascademicrotech.com

Copyright © 2001 Cascade Microtech, Inc.

Innovating Test Technologies